DIGITUS®

TOPSELLER
// 2013

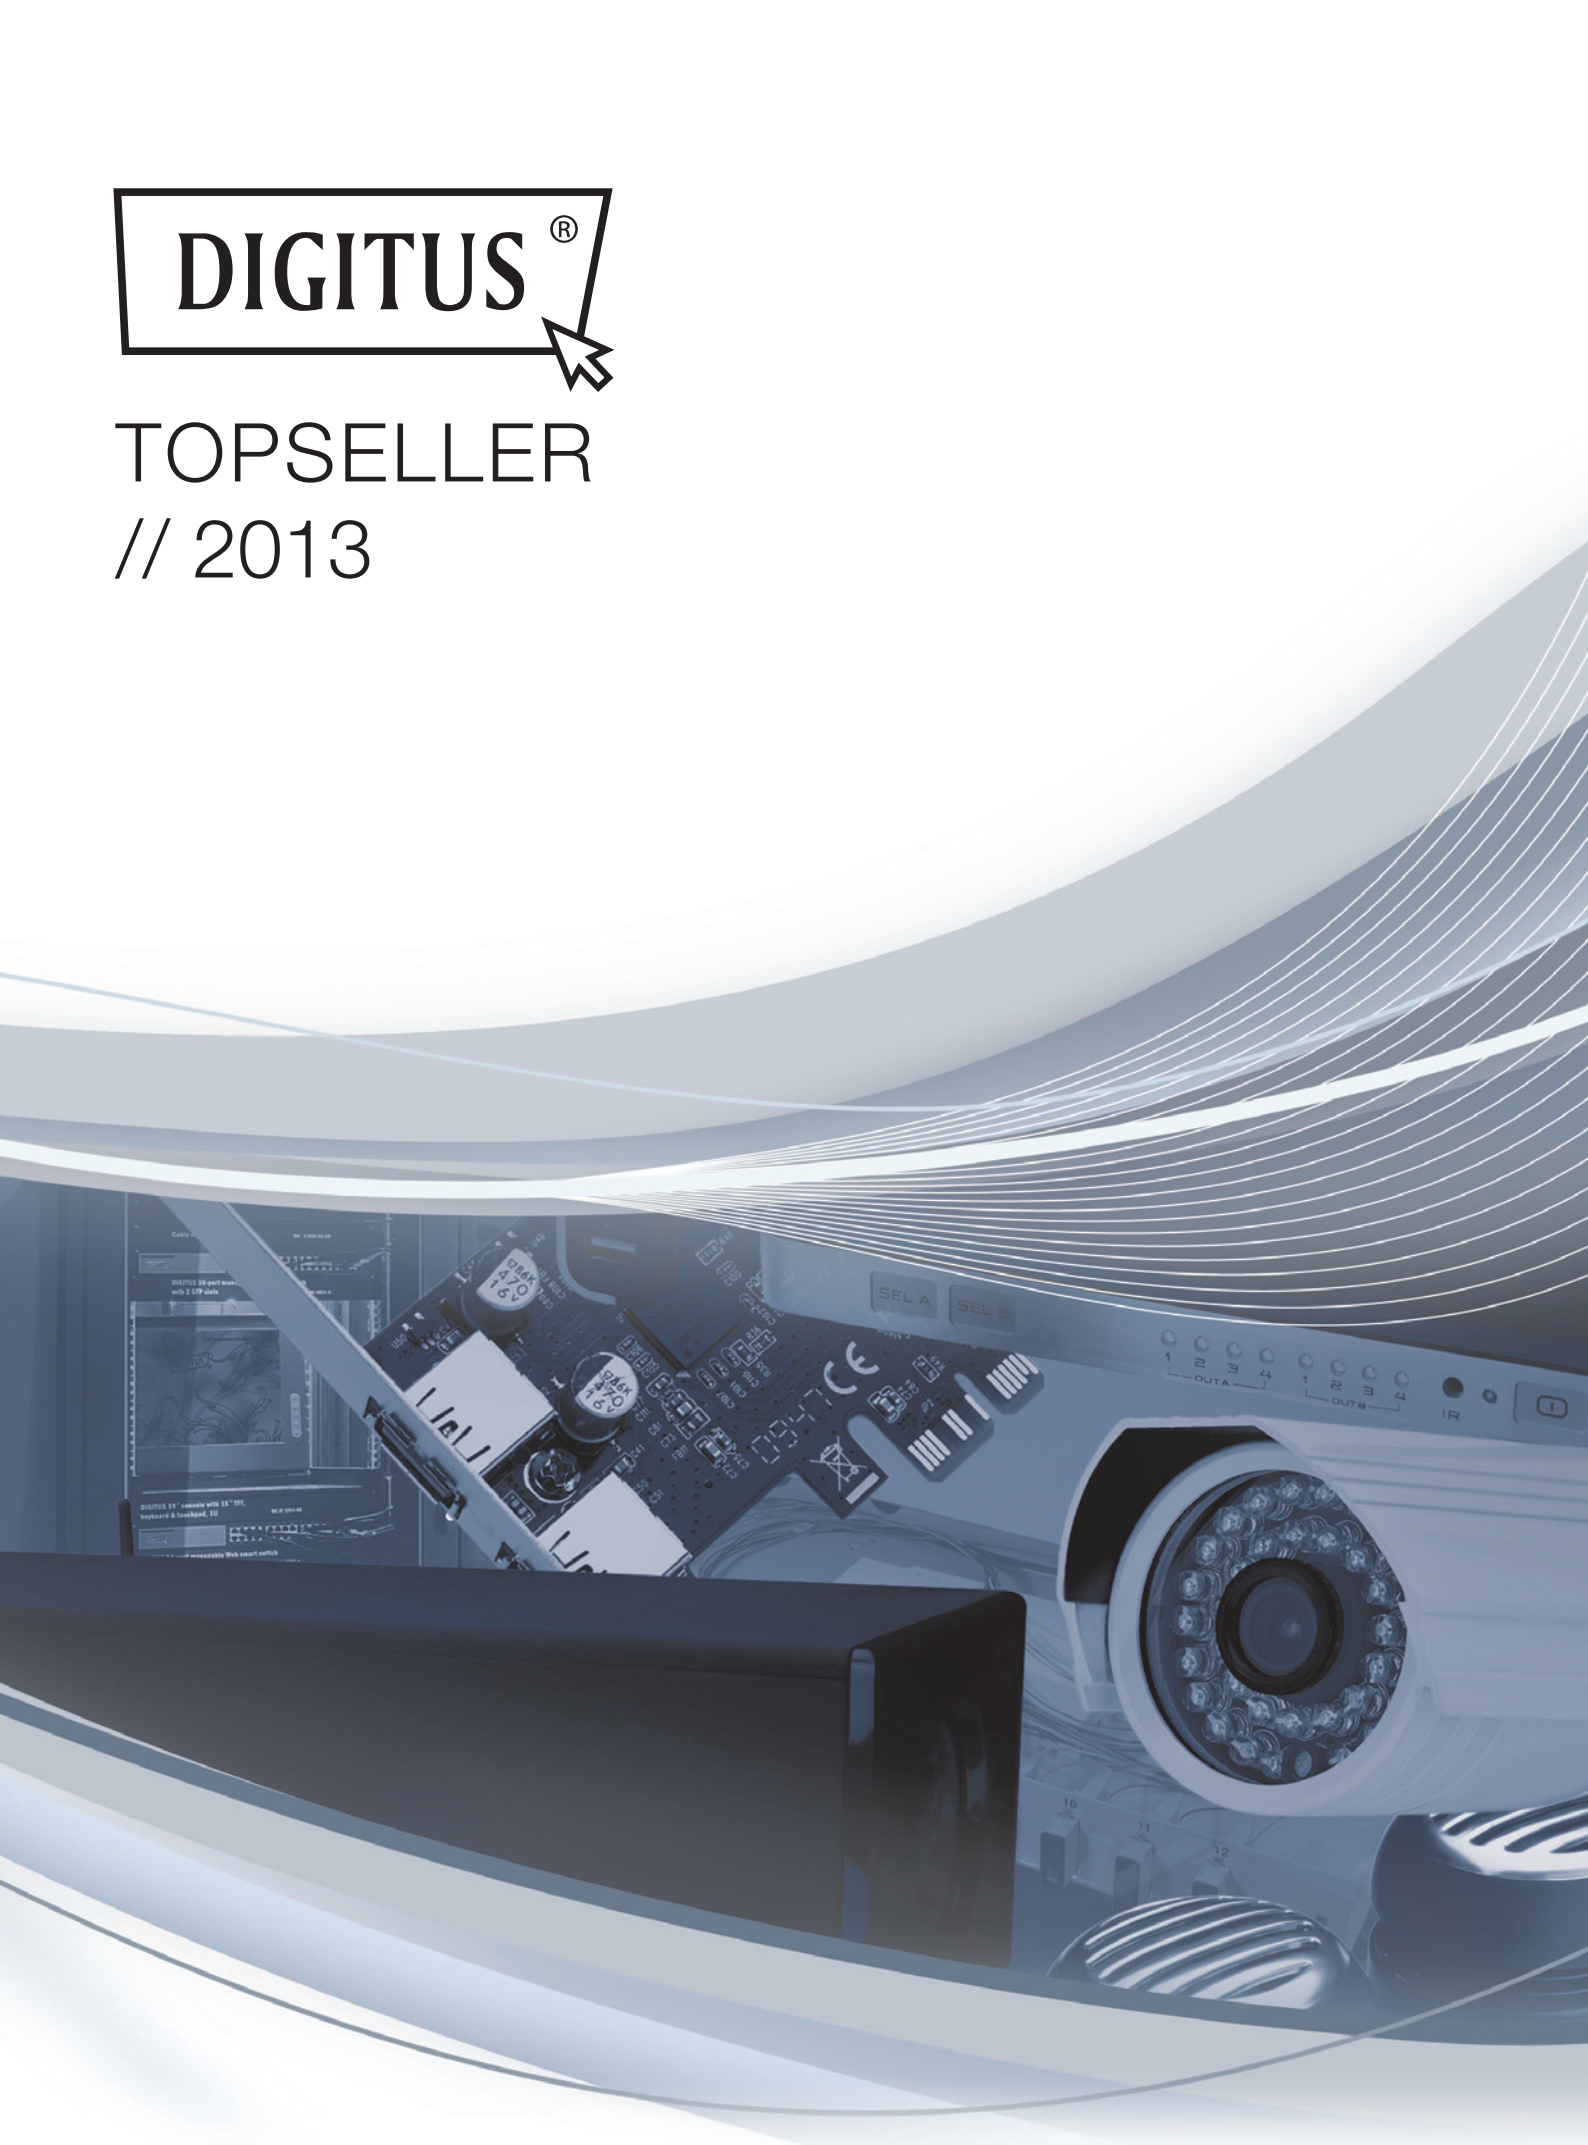

ASSMANN IT-Solutions AG Schweiz

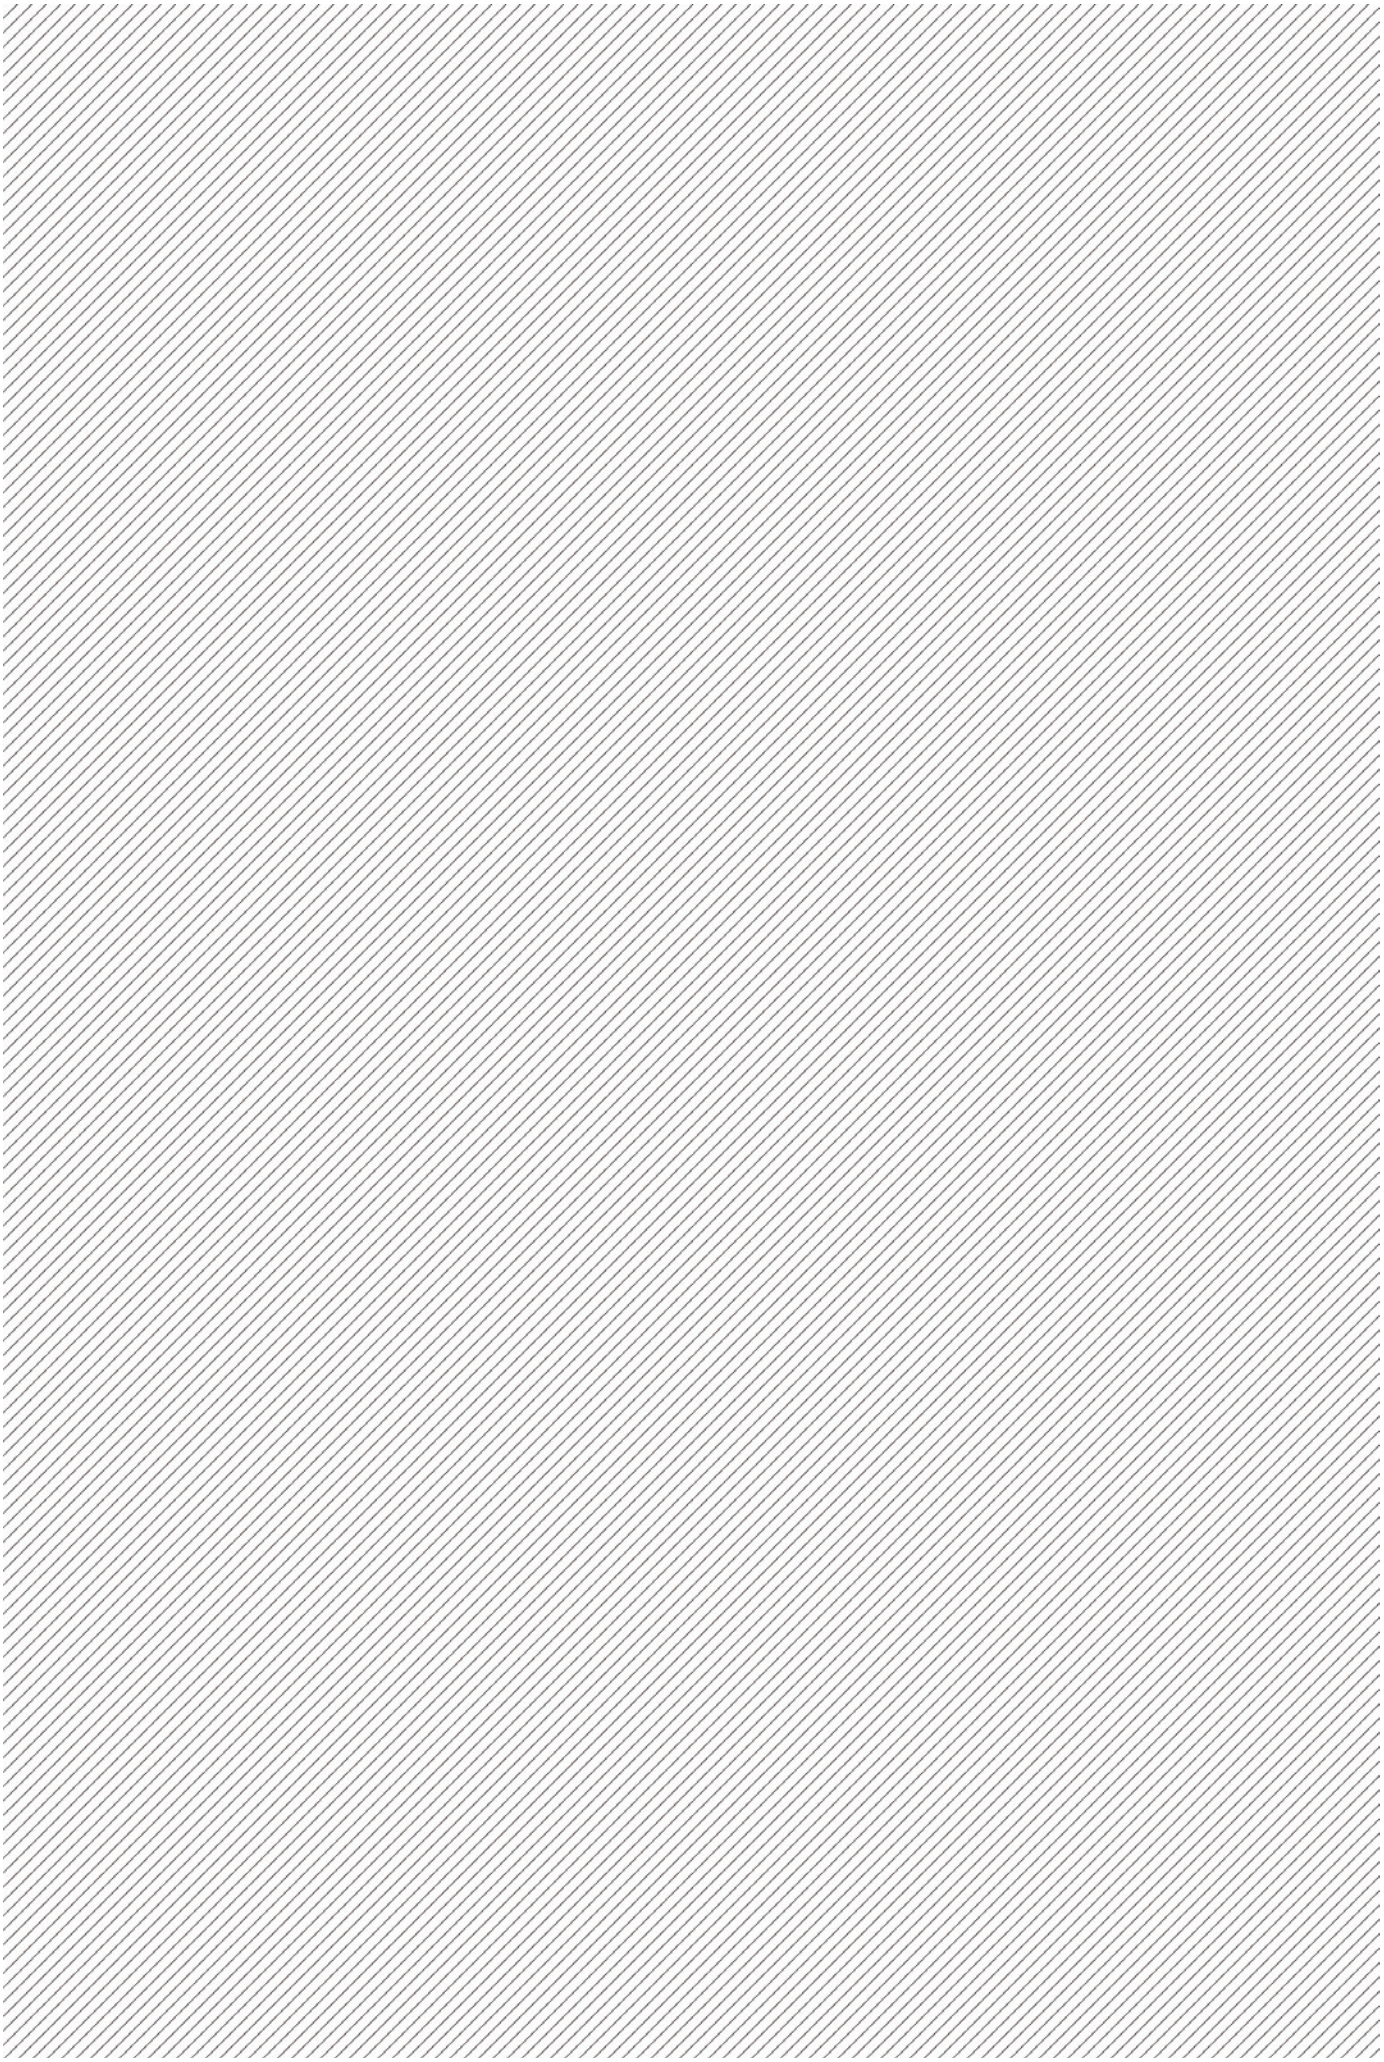

Content

DIGITUS® Plug&View Security Cameras....4 - 5
Private Cloud....6
Portable Speakers....7
Speaker....8
Bluetooth Sound Systems....9
Batteries & Charging Adapters....10
Wireless & USB Adapter....11
High-Speed Powerline Ethernet Adapter....12
Gigabit USB Hub & NAS Server....13
Patch Panel....14
Keystone Module....15
Twisted Pair & Patch Cable....16
Network & Server Cabinets....17
LWL....18
DVI- & HDMI-Cable....19
Cable & Converter....20
HDMI Switch & Splitter....21
PCI Express Card....22
PCI interface Card....23
Hard Disk Housing & Docking Stations....24
Hard disk accessories....25
USB 2.0 Hubs....26
Adapter & Cable....27
Current Catalogs....28
History....29

The indicated prices reflect retail prices
in CHF incl. 8% VAT

DIGITUS® Plug&View Security Cameras

DIGITUS® Plug&View App

Common network cameras require substantial efforts and high technical know-how to install and configure cameras. The biggest problem herewith is the connectivity from the outside via the Internet.
Necessary information and configuration are often:

- Firewall and router ports must be released.
- The respective IP address must be known.
- An external service such as DynamicDNS must be installed so that the camera can generally be addressed via the Internet.
- A network router must be linked to the own network.
- The network router must be linked to an external service provider.

The DIGITUS® Plug&Viewuse a new and innovative way of setting via the online service “myDIGITUS” and the individual code of each camera, a connection between user and camera is built up automatically. That makes a time consuming and complex installation obsolete.

With the help of the installation assistant the camera is ready for use within several minutes. After registering the camera in the “myDIGITUS” portal it will be recognized automatically and the camera will be added to the user account. Now the camera can be accessed from anywhere via PC, smartphone or tablet to view the snapshots or video recordings or to adjust the settings.

Camera properties				
Products	DIGITUS® OptiView™	DIGITUS® OptiVision™	DIGITUS® OptiArc™	DIGITUS® OptiMax™
Articlenumber	DN-16028	DN-16027	DN-16036	DN-16037
Name	IP-Camera	HD Cube Camera	HD Pan & Tilt Camera	HD Bullet Camera
Indoor/Outdoor	Indoor	Indoor (Day & Night)	Indoor (Day & Night)	Outdoor (Day & Night)
QR Code Scan Registration	✓	✓	✓	✓
Client Web Browser Access	✓	✓	✓	✓
Multiple Browsers	✓	✓	✓	✓
Smartphone Access	✓	✓	✓	✓
Motion Detection	✓	✓	✓	✓
Video Resolution	VGA (640 x 480)	2 Megapixel (1.600 x 1.200)	2 Megapixel (1.600 x 1.200)	2 Megapixel (1.600 x 1.200)
Frame Rate	15/30	15/30	15/30	15/30
Video Format	MJPEG	H.264	H.264	H.264
Remote PTZ Control	–	–	✓	–
Remote Configuration	✓	✓	✓	✓
Audio	1-Way Audio	2-Way Audio	2-Way Audio	–
Google Drive Backup	✓	✓	✓	–

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® Plug&View Security Cameras

DIGITUS® OptiView

Your HD network camera – simple to install in less than one minute.

· For interior surveillance, also in the dark
· Powerful mobile surveillance supporting iOS and Android devices
· Wireless LAN in state-of-the-art 11n standard for streaming transfers
· Simple and quick installation with P2P support & QR code scanning
· Extended motion recognition – notification via email
· Integrated web server supports computer-less operations with direct link to Internet
· MJPEG image compression and 4x digital zoom
· LAN speed: 10/100Base TX Ethernet
· Supports Micro SD cards up to 32GB
· Works with most browsers
· Operation Temperature: 0°C - 40°C
· Power supply: (±10%): DC5V / 1.5A
· Dimensions: 135 x 60 x 64mm
· Provided mounting materials allow simple assembly

284062 / DN-16028 DIGITUS® OptiView **67.50**

DIGITUS® OptiVision

Your Day & Night network camera assures powerful and mobile surveillance during the day and at night.

· Video stream with little delay and network load through the H.264 compression format
· Powerful mobile surveillance supporting iOS and Android devices
· Wireless LAN in state-of-the-art 11n standard for streaming transfers
· Works with most browsers
· Simple and quick installation with P2P support & QR code scanning
· LAN speed: 10/100Base TX Ethernet
· Supports up to 25fps (images per second) as HD720 and 15fps as UXGA
· Supports Micro SD cards up to 32GB
· Powerful motion detection – automatic image taking and image securing via email/FTP server
· Operation Temperature: 0°C - 40°C
· Power supply (±10%): DC5V / 1.5A
· Dimensions: 48 x 85 x 110mm
· Provided mounting materials allow simple assembly

324355 / DN-16027 DIGITUS® OptiVision **139.00**

DIGITUS® OptiArc

Install your remote controlled motorized Pan & Tilt network camera simply and in less than a minute.

· Remote controlled motorized pan and tilt function
· Wireless LAN in state-of-the-art 11n standard for streaming transfers
· Video stream with little delay and network load through the H.264 compression format
· Simple and quick installation with P2P support & QR code scanning
· Supports Micro SD cards up to 32GB
· LAN speed: 10/100Base TX Ethernet
· Powerful mobile surveillance supporting iOS and Android devices
· Works with most browsers
· Removable antenna
· Powerful motion detection – automatic image taking and image securing via email/FTP server
· Supports up to 25fps (images per second) as HD720 and 15fps as UXGA
· Horizontally adjustable up to 270°
· Vertically adjustable up to 90°
· Operation Temperature: 0°C - 40°C
· Power supply (±10%): DC5V / 2A
· Dimensions: 100 x 99 x 118mm
· Provided mounting materials allow simple assembly

324362 / DN-16036 DIGITUS® OptiArc **179.00**

DIGITUS® OptiMax

Your outdoor network camera provides powerful mobile surveillance with support for iOS and android devices.

· Wireless LAN in state-of-the-art 11n standard for streaming transfers
· Video stream with little delay and network load through the H.264 compression format
· Simple and quick installation with P2P support & QR code scanning
· Powerful mobile surveillance supporting iOS and Android devices
· LAN speed: 10/100Base TX Ethernet
· Works with most browsers
· Powerful motion detection – automatic image taking and image securing via email/FTP server
· Supports up to 25fps (images per second) as HD720 and 15fps as UXGA
· Operating temperature: -10°C ~ +50°C
· Power supply (±10%): DC12V / 1A
· Dimensions: 160 x 60 x 60mm
· Provided mounting materials allow simple assembly

324379 / DN-16037 DIGITUS® OptiMax **199.00**

Private Cloud - Enjoy the new cloud connection

DIGITUS® “PrivateCloud” Drive

The new mobile solution to expand your storage wirelessly.

The DIGITUS® “PrivateCloud” drive allows the user a simple and portable way to wirelessly access the data in its external storage. It thus enables the expansion of the generally limited memory of mobile devices, such as a tablet or smartphone. Whether you want to watch videos and images or want to access music and documents, the DIGITUS® “PrivateCloud” drive transports all the data to your Windows, Mac or Android system.
The addition to the drive is the DIGITUS® “PrivateCloud” app for iOS and Android. With this app, you can access everything on the DIGITUS® “PrivateCloud” drive, in the car, on train trips or family travel, amongst others.

DIGITUS® „PrivateCloud“ App

DIGITUS® „PrivateCloud“ Drive

Via browser on your notebook or your PC

Via app on your smartphone or your tablet

- Transfers media wirelessly to up to 3 devices
- Supports WiFi 802.11 b/g/n
- WiFi 150Mbps 1T1R
- Internet bridge connection
- Built-in Li-Ion battery (not replaceable)
- Battery life: up to 4hrs (with one user)
- Standby time: up to 25hrs
- Supports most SD cards and USB memory devices
- Available app for iOS and Android, works with all mobile devices
- USB 2.0 port (for charging and data transfer)
- 1 x USB (supports USB storage devices)
- 1 x SD Card slot
- Parallel support for Internet download/upload function connection with WiFi extension function
- Connects automatically, after the app is started
- For iPad, iPhone, iPod touch as well as for Android tablets and smartphones
- Supports Windows 2000/XP/Vista/7, Mac OS 10.X

Available on the iPhone App Store Google play

320029 / DN-7025 DIGITUS® „PrivateCloud“ Drive **89,00**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® “SuperBass” Portable Speaker

The “Bass Machine” with patented sound technology

This high-quality portable speaker in a full metal housing lets you enjoy your favourite music again and again and everywhere! The integrated rechargeable battery makes you independent from any power supply. Connect your PC, laptop, MP3 player, iPod or your iPhone/iPad, Smartphone or cell phone with the loudspeaker – and you are all set. Audio transmitted at low frequency (LFE) as well as interruption-free audio transmission technology provide optimal performance. In addition, the speaker is based on patented sound technology and a special acoustic design structure that enhances the sound quality with the help of air pressure. That helps implementing even loudest volumes without any distortion.

· Portable speaker in full metal housing
· Patented sound technology delivers balanced sound with powerful bass
· Suitable for smartphones, tablets, notebooks and MP3 players
· For connection via standard 3.5mm jack plug (cable incl.)
· Resistant to water spray and other environmental influences
· Output power: 3 watts
· Li-Ion battery 450mAh / Charging function via USB (cable incl.)
· Playback time: up to 6hrs
· Dimensions: 60 x 50mm

311157 / DA-10285-1 “SuperBass” Portable Speaker **33,50**

DIGITUS® “SuperBass” Portable Bluetooth Speaker

2 in 1 - wireless speaker and speakerphone in a compact housing

This high-quality portable Bluetooth speaker in a full metal housing lets you enjoy your favourite music any time and everywhere! For that, connect your PC, laptop, MP3 player, iPod or your iPhone/iPad, Smartphone or cell phone via Bluetooth or cable to your speaker – and you are all set. Thanks to the integrated micro-phone you have additional hands-free functions and thus you may conduct e.g. phone conferences. Enjoy your mobility through a wireless connection from up to 10 meters. The integrated rechargeable battery makes you independent from any power supply. Low frequency audio transmission (LFE) and interruption-free audio transmission technology provide optimal performance. In addition the loudspeaker is based on a special acoustic design structure that amplifies the sound quality with the help of air pressure. That helps implementing even loudest volumes without any distortion.

· Portable Bluetooth speaker in full metal housing
· Built-in speakerphone, ideal for conference calls or in the car, amongst other things
· For incoming calls, the music stops and you hear a phone signal
· The incoming call can be taken via the speaker
· Suitable for smartphones, tablets, notebooks and MP3 players
· Bluetooth 2.1, range up to 10m
· Also suitable for connection via 3.5mm jack plug (cable incl.)
· Output power: 2 watts
· Li-Ion battery 500mAh / Charging function via USB (cable incl.)
· Playback time: up to 6hrs
· Dimensions: 59 x 57mm

311164 / DA-10287 “SuperBass” Portable Bluetooth Speaker **52,00**

Speaker - Music enjoyment in great style

DIGITUS® Bluetooth “RockBass” Speaker

Wireless stereo music enjoyment - always there!

- Portable Bluetooth stereo speakers
- Offer excellent sound quality for smartphones, tablets, notebooks and MP3 players
- Always with you, thanks to its compact design
- Bluetooth 2.0, range up to 10m, supports A2DP, AVRCP
- Output power: 2 x 2 watt Stereo
- Battery capacity: 500mAh / Charging function via built-in USB cable
- Playback time: up to 8hrs
- Dimensions: 50 x 53mm

322856 / DA-10288 Bluetooth “RockBass” Speaker, red / black	**55,00**
322863 / DA-10289 Bluetooth “RockBass” Speaker, white / black	**55,00**
322870 / DA-10290 Bluetooth “RockBass” Speaker, black / silver	**55,00**
322887 / DA-10291 Bluetooth “RockBass” Speaker, carbon / red	**55,00**

DIGITUS® “ColorSplash” Speaker

Do you want more than just a simple speaker? Then, the DIGITUS® “ColorSplash” is a great and lively alternative. These speakers can be easily connected to your PC, Smartphone or any other device with a 3.5mm audio jack. You do not need batteries for this. Simply connect the device via USB and thus provide a great water and light spectacle. The water fountains adapt to the beats and a real disco feeling arises thanks to the four different colors.

- Suitable for smartphones, tablets, MP3 players and PCs
- Speaker output power 3W x 2
- Mini speaker in stylish design
- Dimensions: 6.3 x 5.1 x 22.0cm

318798 / DA-10237 “ColourSplash” Speaker, pink	**49,00**
318781 / DA-10238 “ColourSplash” Speaker, white	**49,00**
318415 / DA-10239 “ColourSplash” Speaker, black	**49,00**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® Bluetooth “Soundbar” with Subwoofer

Enjoy music wirelessly

- Stationary Bluetooth stereo speaker - ideal for living and work areas
- Offers excellent sound quality for music playback from smartphones, tablets, notebooks and MP3 players
- Bluetooth V2.1, range up to 10m, supports A2DP, AVRCP
- Output power: 2 x 5 watt Stereo
- Power supply via universal power adapter 110 to 240V
- Dimensions: 30 x 20 x 15cm

322917 / DA-10294 Bluetooth “Soundbar” with Subwoofer **76,50**

DIGITUS® Bluetooth “ColorSoundbar”

Color up your life!

- Stationary Bluetooth stereo speaker - ideal for living and work areas
- Offers excellent sound quality for music playback from smartphones, tablets, notebooks and MP3 players
- Bluetooth 3.0, range up to 10m, supports A2DP, AVRCP
- Output power: 2 x 15 watt Stereo
- Power supply via universal power adapter 110 to 240V
- Dimensions: 24 x 13.6 x 10cm

Exchangeable front cover in black, blue and pink (incl.)

322924 / DA-10295 Bluetooth “ColourSoundbar” **98,50**

DIGITUS® Bluetooth “Soundbar” with Subwoofer

Enjoy your favourite music wirelessly with the latest Bluetooth technology

- Stationary Bluetooth stereo speaker with subwoofer
- Offers excellent and powerful sound for music playback from smartphones, tablets, notebooks and MP3 players
- Extra-large reception range via external Bluetooth antenna with 2dB gain
- Bluetooth 2.1, range up to 30m, supports A2DP, AVRCP
- Output power: 2 x 25 watt Stereo
- Power supply via universal power adapter 110 to 240V
- Dimensions: 60 x 18 x 22cm

322931 / DA-10296 Bluetooth „Soundbar“ mit Subwoofer **189,00**

Batteries & Charging Adapters - Never again without power

DIGITUS® "PowerRocket" 2200

- Charges smartphones, GPS devices, tablets and other mobile devices, regardless of the power supply
- Slim and lightweight, ideal for traveling
- Universal USB charging port, output 5V/1A
- Capacity display through LEDs
- Built-in Li-Ion battery with 2200mAh capacity for one or two smartphone charging operations
- Internal battery charging via USB (cable incl.)

DIGITUS® „PowerRocket" 4000

- Charges smartphones, GPS devices, tablets and other mobile devices, regardless of the power supply
- Small and lightweight, ideal for traveling
- Universal USB charging port, output 5V/1A
- Capacity display through LEDs
- Built-in Li-Ion battery with 4000mAh capacity for three to four smartphone charging operations
- Internal battery charging via USB (cable incl.)

323075 / DA-11100 „PowerRocket" 2200	**45,50**
323082 / DA-11101 „PowerRocket" 4000	**62,50**

DIGITUS® Graphics adapter

Connect 2 or more monitors / projectors to your computer

- Expand your work place (Dual Display): connect additionally a monitor, TV or projector via the USB interface.
- Supports USB 2.0 specifications
- User friendly applications: Screen rotation, multi-screen management, screen recognition (EDID)
- Supports several playback modi: Main/expanded display, mirroring
- Up to 6 graphics adapters simultaneously usable for PC, 4 for Mac
- Resolution up to 1920 x 1080 Full HD
- Video storage: 8MB SDRAM
- Video streaming is supported up to 1080p
- Colour depth up to 32 Bit
- Power supply via USB Port
- Supports DirectX 3D graphics accelerator
- Compatible with newest ATI & nVidia graphics cards
- Supports Windows 7 / Vista / XP, Mac OS / Linux (OS Ubuntu) environment

Back view DA-70833

Back view DA-70834

Back view DA-70851

299837 / DA-70833 Graphics adapter, USB 2.0 on VGA	**59,00**
299899 / DA-70834 Graphics adapter, USB 2.0 on DVI	**69,00**
299974 / DA-70851 Graphics adapter, USB 2.0 on HDMI video adapter	**79,00**

Samsung 30pin 3-in-1 Cable, extendable

- Practical cable combination with USB connector (USB A) to the connector for mini/micro USB and Samsung Galaxy Tab (30-pin)
- Rollable - ideal on the go and for traveling
- With only one cable, almost all devices can be charged and synchronised on the go
- Length: 0.75m

3-in-1 Cable for Apple, extendable

- Practical cable combination with USB connector (USB A) to the connector for mini/micro USB and Apple dock connector (30-pin)
- Rollable - ideal on the go and for traveling
- Suitable for loading and synchronising of Apple iPod, iPhone (up to 4S) as well as iPad 1 & 2
- With only one cable, almost all devices can be charged and synchronised on the go
- Length: 0.75m

316749 / AK-620300-075-S Samsung Dock 3-in-1 Cable, black, 0.75m	**19,90**
316725 / AK-600300-075-W Apple Dock 3-in-1 Cable, white, 0.75m	**19,90**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® Wireless 300N USB-Adapter

Offers a greater range and a higher data throughput for online and multimedia applications

High-Speed data transfer from up to 300Mbps

- Corresponds with 802.11n standard and is downward compatible to IEEE 802.11g/b standards
- Supports WPS (WiFi Protected Setup) – Pressing a button on the adapter automatically provides a safe connection to the network.
- Supports 64/128-bit WEP, WPA and WPA2 encryption
- Suitable for all common network environments
- Dimensions (W x D x H): 2.4cm x 5.2cm x 1.0cm
- 2 Antennas (1T2R)
- Supports Windows 7, Vista, XP, Mac OS X and Linux

316978 / DN-70542 Wireless 300N USB Adapter, small	**19,90**
301691 / DN-7042-1 Wireless 150N USB Adapter, ultra-small	**12,50**
291640 / DN-7045 Wireless 150N USB Adapter	**14,50**

DIGITUS® Wireless 300N USB Antenna Adapter

Flexible - with removable antenna

High-Speed data transfer of 150Mbps up to 300Mbps

- Corresponds with 802.11n standard and is downward compatible to IEEE 802.11g/b standards
- Interchangeable 3dBi antenna with RP-SMA connector
- Various security features such as WPA2/WPA/WEP encryption
- Suitable for all common network environments
- Supports WPS (WiFi Protected Setup)
- Compatible with USB 1.1 and USB 2.0 interface
- Status LEDs for connection and data transfer
- 1 transmission channel / 2 receiving channels
- Supports Windows 7, Vista, XP, Mac OS X and Linux

316985 / DN-70543 Wireless 300N USB Antenna Adapter	**21,00**
307358 / DN-70440 Wireless 150N USB Antenna Adapter	**17,00**

DIGITUS® USB 2.0 to Gigabit Ethernet Adapter

Integrate your computer in a Gigabit Ethernet Network!

This USB to Gigabit Ethernet Adapter turns any USB port into an Ethernet port. Consequently you may connect your PC or your notebook with your home network or Internet router and thus transfer your data within your network and enjoy multi-player games.

- Ethernet IEEE 802.3, 802.3u and 802.3ab (10Base-T, 100Base-TX and 1000 Base-T) compatible, with automatic detection and adjustment
- Auto-MDI(X) capable (automatic detection of crossed or uncrossed cable types)
- Supports USB 2.0 full speed and high speed (power supply via USB bus)
- Supports “full duplex” and “half-duplex” mode
- LAN 7500 chipset
- 1 x RJ-45 (STP) connection, USB socket Type A
- Power supply via USB bus, plug & play
- LED status display
- Suitable for all common network environments
- Supports Windows 7, Vista, XP, Mac OS X and Linux

315292 / DN-10150-1 USB 2.0 to Gigabit Ethernet Adapter	**29,90**
315285 / DN-10050-1 Fast Ethernet USB 2.0 Adapter	**22,00**

High-Speed Powerline Ethernet Adapter - Network access at every electrical outlet

DIGITUS® High-Speed Powerline Ethernet Adapter, 500Mbps

The simply to be installed plug & play adapter expands Powerline networks with a transfer rate of up to 500Mbps

Adapter with network connection (RJ-45) for shared Internet access via DSL modem via existing in-house power supply

- Data transfer rate of up to 500Mbps via in-house power supply
- Gigabit Ethernet network connection
- Ranges from up to 300 meters through rooms and across storeys
- Bug-proof through integrated encryption
- Particularly compact design – not bigger than a power supply unit
- Meets the standard HomePlug AV
- Works also for game consoles with network connection or IPTV set top boxes.

302223 / DN-15024	High-Speed Powerline Ethernet Adapter, 500Mbps	**59,00**
302230 / DN-15025	High-Speed Powerline Starter-Kit, 500Mbps	**109,00**

DIGITUS® High-Speed Powerline Ethernet Adapter, 200Mbps

The simple to install Plug & Play Adapter expands Powerline Networks and offers network access at every power outlet

Adapter with network connection (RJ-45) for shared Internet access via DSL modem via existing in-house power supply

- Data transfer rate up to 200Mbps via in-house power supply system
- Ranges from up to 300 meters through rooms and across storeys
- Bug-proof through integrated encryption
- Particularly compact design – not bigger than a power supply unit
- Meets the standard HomePlug AV
- Also suitable for game consoles with network connection
- Safety key for software-free configuration
- "Power Pack Utility" offers the possibility to untrained users to manage their HomePlug network (optional)

309802 / DN-15026	High-Speed Powerline Ethernet Adapter, 200Mbps	**45,50**
309819 / DN-15027	High-Speed Powerline Starter Kit, 200Mbps	**75,90**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® 4-Port Gigabit Network USB-Hub

Use your USB devices via the network – wherever you want it

Simple configuration via the Web interface

· Links 4 USB 2.0 High-Speed devices to the network
· There is no difference to directly connected USB devices
· Supports printers, loudspeakers, hard disks, flash memory, cardreader and many other devices
· USB device monitoring via a web-browser or the provided software
· Use of USB devices possible via any computer in the network whether wireless or linked by cable
· 4 x USB 2.0 Ports
· Downward compatible to older USB devices
· LAN: 10/100/1000Mbps
· DHCP client for automatic login to network
· Supports Windows 7, Vista and XP

Package contents
· Network USB-Hub
· Product Support CD-ROM
· Quick start guide

276593 / DN-13010 4-Port Gigabit Network USB-Hub **62,50**

DIGITUS® Mini NAS server for external USB hard disks

The compact and energy efficient NAS server for the shared file access via the network!

The Mini NAS server brings USB 2.0 hard disks to the network

· NAS function (Network Attached Storage) to release the hard disk to the local network or Internet
· Allows simple storage, exchange and data securing in the entire network
· Network RJ45 connection for fast Ethernet 10/100Mbps
· Samba and FTP server for simple file access
· BitTorrent server for automatic downloads even with turned-off computer
· Simple access to photos, movies or music via iTunes, Xbox 360 and PlayStation 3
· Supports Windows 7, Vista, XP, Mac OS X and Linux
· Energy consumption 2.5 Watt

Package contents
· Mini-NAS
· Product Support CD-ROM
· User Manual
· Quick start guide

272977 / DN-7023-1 NAS server for external USB hard disks **49,00**

Patch Panel - Excellent connection quality for your network

DIGITUS® CAT 6, Class E Patch Panel

Excellent performance and connecting quality for your network

Produced acc. to specifications of Link Performance Class E for up to 250MHz, ISO/IEC 11801 and EN 50173

- Shielded RJ45 sockets
- Cable installation via LSA rails, colour coded acc. to EIA/TIA 568B
- Possible fixing for cable ties, central ground connection
- Suitable for 483mm (19") Rack Mount
- Housing material: SECC, 1.5mm galvanised cold-rolled steel acc. to EN1.4301, UNS S30400, AISI 304 and LMSAD110

- Category CAT 6
- HE 1
- Colour light grey, RAL 7035
- Ports 16

241607 / DN-91616S 16-Port, shielded, Rack Mount **59,00**

DIGITUS® Desktop CAT 6, Class E Patch Panel, shielded

Use in SOHO applications

Produced acc. to specifications of Link Performance Class E for up to 250MHz, ISO/IEC 11801 and EN 50173

- Class E up to 250MHz, ISO IEC 11801, EN 50173
- 1 Gbit Ethernet
- Housing material: SECC, 1.5mm galvanised cold-rolled steel acc. to EN1.4301, UNS S30400, AISI 304 and LMSAD110
- Shielded RJ45 sockets, 8P8C
- Cable installation via LSA rails, colour coded acc. to EIA/TIA 568 A & B
- Possible fixing for cable ties
- Central ground connection
- Desktop version

- Category CAT 6
- Ports 8
- Colour black, RAL 9005
- HE 1
- Size (HxWxD) 44 x 162 x 112mm

241584 / DN-91608SD 8-Port, shielded, Desktop Version **39,00**

DIGITUS® CAT 6, Class E Patch Panel

Excellent performance and connecting quality for your network

Produced acc. to specifications of Link Performance Class E for up to 250MHz, ISO/IEC 11801 and EN 50173

- Cable installation via LSA rails, colour coded acc. to EIA/TIA 568B
- Possible fixing for cable ties, central ground connection
- Suitable for 483mm (19") Rack Mount
- Housing material: SECC, 1.5mm galvanised cold-rolled steel acc. to EN1.4301, UNS S30400, AISI 304 and LMSAD110
- Unshielded RJ45 sockets, 8P8C

- Category CAT 6
- Ports 24
- HE 1

241553 / DN-91624U 24-Port, unshielded, Rack Mount **49,90**

DIGITUS® CAT 3 ISDN Patch Panel, unshielded

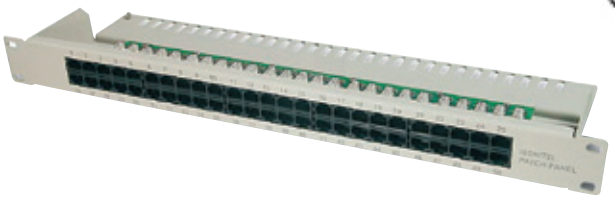

Excellent performance and connecting quality for your network

CAT 3 ISDN Patch Panel, 50 Port, 1U

- Suitable for 483mm (19") Rack Mount
- Housing material: SECC, 1.5mm galvanised cold-rolled steel acc. to EN1.4301, UNS S30400, AISI 304 and LMSAD110
- Unshielded RJ45 sockets, 8P8C
- Contact material: Phosphor bronze
- Contact plating: Nickel, gold-plated 0.3µ
- Cable installation via LSA rails, colour coded acc. to EIA/TIA 568 A & B
- Material LSA contacts: Phosphor bronze with 50µ tinning via 60µ Ni-plating
- Material circuit board: FR4, UL 94V-0, 1.45mm strength
- Insertion force: ≤ 30N
- Mating cycles: ≥ 750 (ISO/IEC 11801, IEC 60603-7-5)
- Operation Temperature: -20°C ... +70°C
- Ampacity: 1A at 50°C
- Insulation resistance > 500MOhm

- Category CAT 3
- Ports 50
- Colour light grey, RAL 7035
- HE 1

269021 / DN-91350-1 50-Port, unshielded **59,90**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® CAT 6A Keystone Module, shielded, tool-free assembly connection

Fast and simple installation without special tools

Tested and 3P certified acc. to specifications for plug connectors acc. to category 6A ANSI/TIA Standard 568-C.2 and IEC Test Standard 60512-27-100. Meets the following standards: IEC 60603-7-51, ANSI/TIA/EIA 568-C.2, IEC 60512-27-100, ISO/IEC 11801 am. 2.

- Housing material: Die-cast zinc – nickel-plated
- Contact material: Phosphor bronze
- 360° Cable shield bonding for improved EMV protection
- Contact plating: Nickel, gold-plated 0.5µ
- Operating temperature: -10°C ~ +60°C (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- Material circuit board: FR4, UL 94V-0, 1.45mm strength
- Mating cycles: ≥ 750 (ISO/IEC 11801, IEC 60603-7-5)
- Diameter Cu conductor: AWG (26 ... 23), flexible and compact
- RJ 45 socket, for patch panel assembly
- Compact design allows in-series installation of 24 items in 483mm (19") 1HE Panels
- Fits patch panel Type DN-91410, DN-91411, DN-91412
- Aperture acc. to Keystone Standard 19.35mm x 14.8mm
- Tool-free cable installation via LSA rails, colour coded acc. to EIA/TIA 568 A & B
- Suitable for the combination with design covers from known manufacturers of switch materials such as Busch-Jaeger Item.-No.: 1812 or 1866EB
- Suitable for the combination with design covers of switch material PEHA Item.-No.: D 600 MJ8
- Suitable for the combination with design covers of switch material FELLER (CH) EDIZIOdue e.g. Item.-No.: 1183-028.FMI.F.61
- Based on compact design simple assembly in floor tanks, surface caps, patch panels and desk housing

293767 / DN-93615	CAT 6A Keystone module, shielded	**10,50**
293927 / DN-93604	CAT 6A Keystone module unshielded	**6,50**

DIGITUS® Modular Patch Panel, 24-Port

Patch Panel for Keystone module

- Housing material: SPCC, 1.0mm cold-rolled steel acc. to JIS G3141-1996
- Cable shielded
- Suitable for 483mm (19") Rack Mount
- 1HE
- Colour grey RAL 7035

280781 / DN-91410	Modular Patch Panel, 24-Port	**29,90**

Twisted Pair & Patch Cable - Optimal connecting quality for your network

DIGITUS® CAT 7 S-FTP Twisted Pair Installation Cable

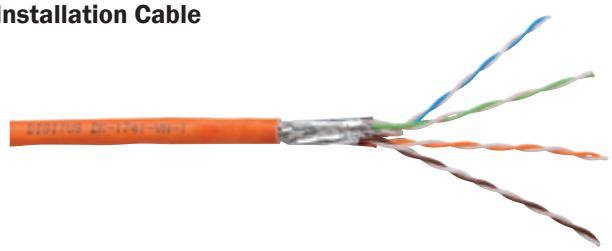

Excellent performance and connecting quality for your network

- 4 x 2 x AWG23 S-FTP CAT7 1200MHz LSZH, data cable
- Suited for structured building wiring in secondary and tertiary areas.
- For building cabling sections of class F, 1000MHz.
- ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1 compliant
- Conductor: blank copper wire AWG 23/1; copper wire 0.57mm nom
- Insulation: SFS-PO
- Total numbers of insulated conductors: 8, twisted to 4 pairs
- Colour code: blue-white, orange-white, green-white, brown-white
- Shielding of single pair: aluminium covered polyester foil, covers 100%
- Total shielding: tin-plated braided copper, 35% cover
- Outer sheath: halogen-free (FRNC/LSZH)
- Outer sheath strength: 0.6mm nom.
- Colour: Orange (RAL 2000)
- Outer diameter: 7.5mm nom.
- Copper (kg/km): 28

247449 / DK-1741-VH-1	100m Ring, CAT 7 Twisted Pair Installation Cable	**155,00**
241324 / DK-1741-VH-5	500m Ring, CAT 7 Twisted Pair Installation Cable	**529,00**
267508 / DK-1741-VH-10	1000m Drum, CAT 7 Twisted Pair Installation Cable	**965,00**
247289 / DK-1741-VH-D-5	500m Drum, duplex, halogen-free outer sheath	**869,00**

DIGITUS® CAT 7 S-FTP Twisted Pair Installation Cable

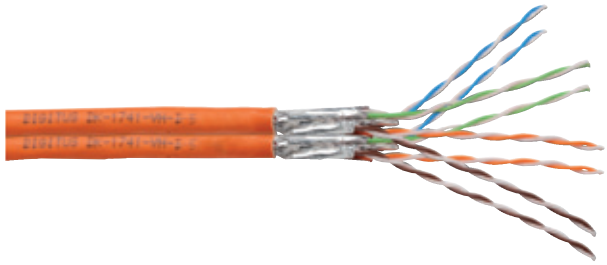

Excellent performance and connecting quality for your network

- Conductor: blank copper wire AWG 23/1; copper wire 0.57mm nom
- Insulation: SFS-PO
- Total numbers of insulated conductors: 8, twisted to 4 pairs
- Colour code: blue-white, orange-white, green-white, brown-white
- Shielding of single pair: aluminium covered polyester foil, covers 100%
- Total shielding: tin-plated braided copper, 35% cover
- Outer sheath: halogen-free (FRNC/LSZH)
- Outer sheath strength: 0.6mm nom.
- Colour: Orange (RAL 2000)
- Outer diameter: 7.5mm nom.
- Copper (kg/km): 28
- Bend radius: dynamic 8 x D mm min, static 4 x D mm min
- Transportation and storage temperature range: -20°C - +75°C

300786 / DK-1743-VH-10	1000m Drum, CAT 7 Twisted Pair Installation Cable	**912,00**

DIGITUS® Premium CAT 6 UTP Patch Cable

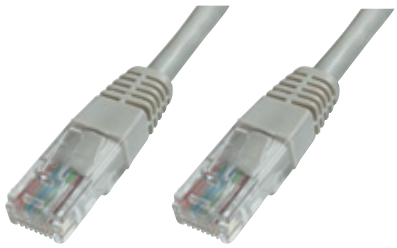

Premium quality for your network

- 4 x 2 AWG 26/7, Twisted Pair
- 2 x RJ45 Plug
- Hoods with kink protector and strain relief
- Length indication on hoods
- UL listed

· Category	CAT 6
· Shielding	U-UTP, unshielded
· Cable design	4 x 2 AWG 26/7, Twisted Pair
· Colour	grey
· Length	0.5m
· Allocation	1:1
· Sheath	PVC

214205 / DK-1611-005	Cat6 Patch cable, 0.5m, colour grey	**6,40**
214212 / DK-1611-010	Cat6 Patch cable, 1.0m, colour grey	**7,50**
214229 / DK-1611-020	Cat6 Patch cable, 2.0m, colour grey	**8,75**
214236 / DK-1611-030	Cat6 Patch cable, 3.0m, colour grey	**9,90**
214243 / DK-1611-050	Cat6 Patch cable, 5.0m, colour grey	**12,90**
214267 / DK-1611-100	Cat6 Patch cable, 10.0m, colour grey	**17,50**

DIGITUS® Premium CAT 6 S-FTP Patch Cable

Premium quality for your network

- 4 x 2 AWG 26/7, Twisted Pair
- 2 x RJ45 Plug
- Hoods with kink protector and strain relief
- Length indication on hoods
- Type CM (UL) C (UL) CMH E222711-F3 3P/ETL Verified
- UL listed

· Category	CAT 6
· Shielding	S-FTP, pairs in metal foil and braiding shielded
· Cable design	4 x 2 AWG 26/7, Twisted Pair
· Colour	grey
· Length	0.5m
· Allocation	1:1
· Sheath	PVC

214922 / DK-1641-005	Cat6 Patch cable, 0.5m, colour grey	**7,50**
214946 / DK-1641-010	Cat6 Patch cable, 1.0m, colour grey	**8,90**
214953 / DK-1641-020	Cat6 Patch cable, 2.0m, colour grey	**11,00**
214960 / DK-1641-030	Cat6 Patch cable, 3.0m, colour grey	**13,00**
214977 / DK-1641-050	Cat6 Patch cable, 5.0m, colour grey	**15,00**
214984 / DK-1641-070	Cat6 Patch cable, 7.0m, colour grey	**17,50**
214991 / DK-1641-100	Cat6 Patch cable, 10.0m, colour grey	**22,00**
215004 / DK-1641-150	Cat6 Patch cable, 15.0m, colour grey	**33,00**
215011 / DK-1641-200	Cat6 Patch cable, 20.0m, colour grey	**37,00**
215028 / DK-1641-300	Cat6 Patch cable, 30.0m, colour grey	**42,00**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® Wall cabinet

The DIGITUS® wall cabinets are made of robust steel sheet construction. Side panels can be removed and can be locked. Simple and fast assembly. The back panel of the cabinet is screwed to the wall and then connected with the cabinet. Optionally, the cabinets can be installed freestanding with separatly available levelling feet or rollers. Through this flexibility these wall cabinets are ideally suited for all commonly known EDP and telecommunication applications.

· 1.1 – 1.5mm robust sheet steel with high load-bearing, powder coated
· Side panels are removable and can be locked
· Venting slots for active and passive ventilation
· Safety class IP 40
· Lockable safety glass door with steel frame
· 483mm (19") profile rails at front panel, depth-variable
· Cable infeed from above and below
· Includes 8 pieces. 19" assembly screw set
· Comprehensice accessories available

Colour	light grey, RAL 7035
HE	7
Size (HxWxD)	402 x 600 x 450mm

135203 / DN-19 07-U	Wall cabinet 7HE, 402 x 600 x 450mm	**239,00**
135210 / DN-19 09-U	Wall cabinet 9HE, 491 x 600 x 450mm	**259,00**
135227 / DN-19 12-U	Wall cabinet 12HE, 624 x 600 x 450mm	**309,00**
135234 / DN-19 16-U	Wall cabinet 16HE, 802 x 600 x450mm	**345,00**

Patch panel for DIGITUS® Network & Server Cabinets

Mounting on 483mm (19") angled profiles

· Steel sheet
· 5 cable routing brackets, 40 x 60mm (1HE), 80 x 60mm (1HE)
· Colour grey RAL 7035

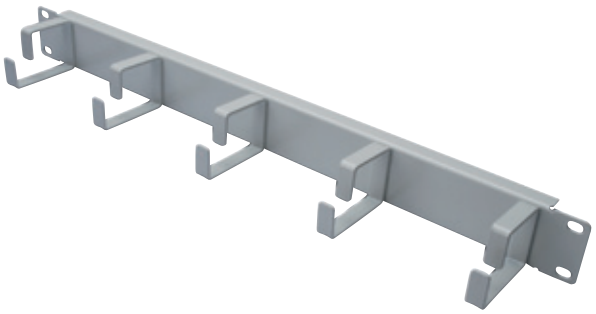

266440 / DN-97601	Patch panel for DIGITUS® network server cabinets, 1HE, 483 x 80 x 44mm	**28,00**

LWL - Maximum performance thanks to fibre glass

DIGITUS® fibre glass splice box, extendible 1HE

Empty housing without front panel

· Carrier housing made from 1.5mm steel sheet, varnished
· Colour: Grey (RAL 7035)
· Width 483mm, depth 220mm, depth of draw 210mm, adjustable depth
· Internal dimensions about: 44 (H) x 428 (W) x 240 (D) mm
· Mount for splice boxes
· Embossings in bottom for mounting the pig tails
· Four receptacles for PG screws and two slotted holes for cables
· PG 16 screw joints and assembly material contained in scope of delivery
· Fits front panels DN-96201, DN-96202, DN-96204, DN-96205, DN-96206, DN-96207

Size (HxWxD)	44 x 483 x 280mm

276647 / DN-96200	Splice box, 1HE, unfitted, extendible	**39,00**
276654 / DN-96201	Front plate 1HE 12 SC-Duplex	**15,00**
276661 / DN-96202	Front plate 1HE 24-SC Duplex	**19,80**
276708 / DN-96204	Front plate 1HE 12ST	**15,00**
276715 / DN-96205	Front plate 1HE 24ST	**19,80**
276722 / DN-96206	Front plate 1HE 12 x LC -Duplex-, SC -Simplex-, E2000 -Simplex-	**15,00**
276739 / DN-96207	Front plate 1HE 24 x SC, LC, E2000 -Simplex	**22,50**

DIGITUS® LWL Multimode OM 3 Patch cable, LC / LC

Excellent performance and connecting quality for your network

· Duplex cable
· LSOH
· Plug with ceramics ferrule
· Cable diameter 3mm
· Individually packaged with measuring log

Connection 1	LC
Connection 2	LC
Cable type	I-VH 2G50/125µ
Fibre class	OM3
Kind	Multi-mode
Colour of cable	turquoise
Hood	monochrome
Fibre diameter	50/125µ
Length	1m
Packaging	DIGITUS® Polybag

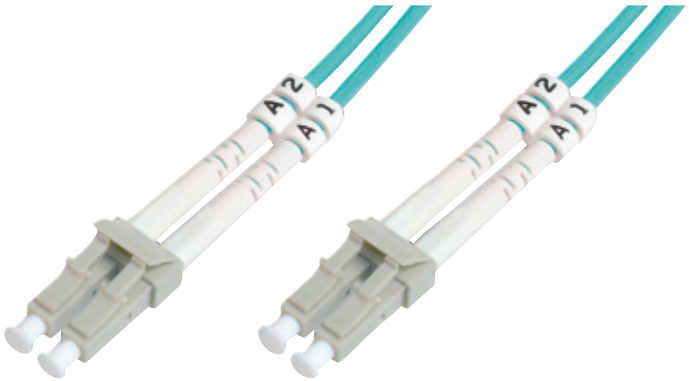

248859 / DK-2533-01/3	LWL Multimode OM 3 Patch cable, 1m	**22,50**
248866 / DK-2533-02/3	LWL Multimode OM 3 Patch cable, 2m	**25,00**
248873 / DK-2533-03/3	LWL Multimode OM 3 Patch cable, 3m	**27,50**
248880 / DK-2533-05/3	LWL Multimode OM 3 Patch cable, 5m	**31,50**
248897 / DK-2533-07/3	LWL Multimode OM 3 Patch cable, 7m	**37,00**
248903 / DK-2533-10/3	LWL Multimode OM 3 Patch cable, 10m	**45,50**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DVI connecting cable, DVI (18+1)/St - DVI (18+1)/St

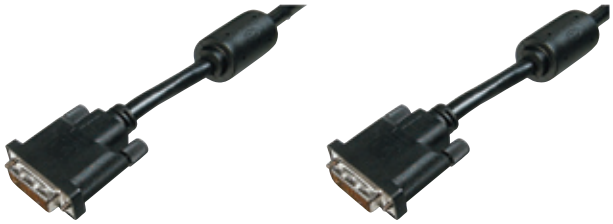

HD ready, single link

This digital, HD ready DVI cable (single link) serves to connect audio/video devices with DVI (18+1) interface such as PC, notebook, monitor, TV or beamer.

· Connection 1	DVI-D, (18+1), plug
· Connection 2	DVI-D, (18+1), plug
· UL certified	UL20276
· HDTV Standard	1080i
· HDTV resolution max.	1920 x 1200 pixel, 60Hz
· Hood	solid cast
· Shielding	Double shielded
· AWG	28
· Wire material	CU
· Ferrite filter	2 x Ferrite Filter
· Contact surface	nickel-plated
· Length	2m
· Packaging	Polybag

298045 / AK-320100-020-S DVI connecting cable, DVI (18+1)/St on DVI (18+1)/St, 2.0m **10,50**

DVI connecting cable, DVI (24+1)/St - DVI (24+1)/St

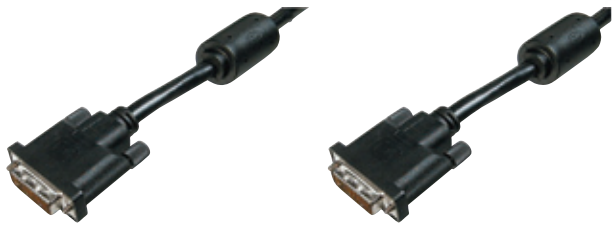

Full HD, dual link

This digital full HD readz DVI cable (dual link) serves to connect audio&video devices with DVI (24+1) interface such as PC, notebook, monitor, TV or beamer.

· Connection 1	DVI-D, (24+1), plug
· Connection 2	DVI-D, (24+1), plug
· UL certified	UL20276
· HDTV Standard	1080p
· HDTV resolution max.	2560 x 1600 Pixel, 60Hz
· Hood	solid cast
· Shielding	Double shielded
· AWG	28
· Wire material	CU
· Ferrite Filter	2 x Ferrite Filter
· Contact surface	nickel-plated
· Length	2m
· Packaging	Polybag

298311 / AK-320101-020-S DVI connecting cable, DVI (24+1)/St - DVI (24+1)/St, 2.0m **12,50**

HDMI High Speed connecting CABLE, Type A/M - Type A/M

Full HD and 3D capable

This full HD (1080p) and 3D capable CABLE connects audio/video devices such as Blue-Ray players, game consoles etc. to TV, monitor or PC.

· Connection 1	HDMI Type A, plug
· Connection 2	HDMI Type A, plug
· HDMI Standard	High-Speed HDMI
· UL certified	UL20276
· HDTV Standard	1080p
· HDTV resolution max.	1920 x 1080 Pixel, 60Hz
· Hood	solid cast
· Shielding	Double shielded
· Wire material	CU
· AWG	30
· Contact surface	nickel-plated
· Colour of cable	black
· Connection colour	black
· Length	2m
· Packaging	Polybag

295006 / AK-330101-020-S HDMI High Speed connecting cable, Type A/M on Type A/M, 2.0m **12,50**

295013 / AK-330101-030-S HDMI High Speed connecting cable, Type A/M on Type A/M, 3.0m **14,00**

295037 / AK-330101-050-S HDMI High Speed connecting cable, Type A/M on Type A/M, 5.0m **15,50**

295044 / AK-330101-100-S HDMI High Speed connecting cable, Type A/M on Type A/M, 10.0m **25,50**

HDMI High Speed connecting cable, with gain, Type A/St - Type A/St

Full HD and 3D capable

This full HD (1080p) and 3D capable cable with active gains serves to connect audio/video devices such as Blue-ray players, game consoles etc. with TVs, monitors or PCs.

· Connection 1	HDMI Type A, plug
· Connection 2	HDMI Type A, plug
· HDMI Standard	High-Speed HDMI
· UL certified	UL20276
· HDTV Standard	1080p
· HDTV resolution max.	1920 x 1200 Pixel, 60Hz
· Hood	solid cast
· Shielding	Double shielded
· Wire material	CU
· AWG	28
· Contact surface	gold-plated
· Colour of cable	black
· Connection colour	black
· Length	15m
· Packaging	Polybag

295808 / AK-330105-150-S HDMI High Speed connecting cable, w/gain, Type A/St - Type A/St, 15.0m **59,90**

295808 / AK-330105-150-S HDMI High Speed connecting cable, w/gain, Type A/St - Type A/St, 15.0m **69,00**

295839 / AK-330105-300-S HDMI High Speed connecting cable, w/gain, Type A/St - Type A/St, 30.0m **119,00**

295846 / AK-330105-400-S HDMI High Speed connecting cable, w/gain, Type A/St auf Type A/St, 40.0m **149,00**

Cable & Converter - Perfect for your home entertainment & PC system

DisplayPort connecting cable, DP/St - DP/St

Ideal for CAD/CAM, GIS, 3D development, real time simulation and more.

This high performance HD digital audio and video cable serves e.g. to connect a PC or notebook with DisplayPort interface with monitors with a DisplayPort interface.

· Connection 1	DP, plug
· Connection 2	DVI-I, (24+5), plug
· DisplayPort Standard	DisplayPort 1.2
· UL certified	UL20276
· Hood	solid cast
· Shielding	Double shielded
· AWG	28
· Wire material	CU
· Contact surface	nickel-plated
· Locking	Snap-on mounting
· Ferrite Filter	none
· Colour of cable	black
· Connection colour	black
· Length	2m

288930 / AK-340100-020-S	DisplayPort connecting cable, DP/St - DP/St, 2.0m	**9,90**
288978 / AK-340100-050-S	DisplayPort connecting cable, DP/St - DP/St, 5.0m	**16,00**
288961 / AK-340100-030-S	DisplayPort connecting cable, DP/St - DP/St, 3.0m	**18,50**

HDMI High Speed with Ethernet Anschlusskabel, Typ A/St - Typ A/St

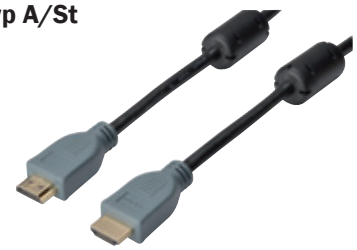

Full HD und 3D tauglich + Ethernet Konnektivität

Dieses Full HD (1080p) und 3D taugliche Kabel, dient dem Anschluss von Audio/Video Geräten, wie beispielsweise Blu-ray Spieler, Spielekonsolen, usw., an einen Fernseher, Monitor oder PC. Auch zur Nutzung jeder IP-basierenden Anwendung geeignet.

· Anschluss 1	HDMI Typ A, Stecker
· Anschluss 2	HDMI Typ A, Stecker
· HDMI Standard	Highspeed HDMI mit Ethernet
· UL zertifiziert	UL20276
· HDTV Standard	1080p
· HDTV Auflösung max.	1920 x 1200 Pixel, 60Hz
· Haube	vergossen
· Schirmung	dreichfache Schirmung
· Adern Material	CU
· AWG	30
· Kontaktoberfläche	vergoldet
· Farbe Kabel	schwarz
· Farbe Anschlüsse	schwarz/grau
· Länge	1 m

297772 / DB-330112-010-D	HDMI High Speed w/ Ethernet Anschlusskabel, Typ A/St auf Typ A/St, 1,0 m	**12,00**
297789 / DB-330112-020-D	HDMI High Speed w/ Ethernet Anschlusskabel, Typ A/St auf Typ A/St, 2,0 m	**18,00**
297796 / DB-330112-030-D	HDMI High Speed w/ Ethernet Anschlusskabel, Typ A/St auf Typ A/St, 3,0 m	**21,00**
297802 / DB-330112-050-D	HDMI High Speed w/ Ethernet Anschlusskabel, Typ A/St auf Typ A/St, 5,0 m	**24,00**

DIGITUS® USB Pocket KVM Switch for DVI, 2-Port

The easiest and fastest way to combine 2 PCs/ notebooks with a work place.

Control of 2 PCs via one USB keyboard, one USB mouse and one DVI monitor

- Full DVI-D support
- Simple installation – no additional software needed
- PC selection via hot key or push button
- Excellent video quality up to 1920 x 1080 Pixel at 60Hz
- Supports DDC, DDC2 Monitors
- Audio IN/OUT – support separately switchable
- "Plug & play" and hot-swappable
- Keyboard and mouse emulation for error-free booting
- Auto-scan (5 to 60 sec., selectable)
- No external power supply needed for operations
- Incl. PC-KVM cable for 2 PCs, length 1.2m
- Supports all Windows, Linux and Mac operating systems with USB support

273301 / DS-11802-1	USB Pocket KVM Switch for DVI, 2-Port	**69,00**

DIGITUS® Multimedia VGA/Audio to HDMI Converter

Renders a VGA video signal via a HDMI screen such as a HDTV device.

Converts a VGA input signal to HDMI and allows PC users to enjoy their screen on an HDMI TV. Conversion is done together with the stereo audio signal. This offers solutions for digital entertainment centres, HDTV, STB, DVD, projectors and many more.

- Converts VGA and audio signals of a PC to a standard-conform HDMI signal.
- Suited for video resolutions up to 1280 x 1024 pixel
- Bandwidth 165MHz/1.65GBps per channel (6.75Gbps all channels)
- Colour depth 8 bit per channel (24 bit all channels)
- HDCP support
- Dimensions (LxWxH; weight): 88 x 68 x 25.5mm; 68g

268994 / DS-40130	Multimedia VGA/Audio to HDMI Converter	**79,00**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® HDMI Matrix Switch, 4 x 2-Port

The comfortable and complete HDMI distribution solution for home entertainment

This HDMI matrix switch combines the advantages of a simple HDMI switch and a HDMI splitter. The splitter transfers one or two HDMI video signals from four selectable input signals to respectively one or two selectable HDMI displays. This offers highest flexibility for all connected systems. All inputs are suited for high definition video sources such as HD DVD, receiver, set-top boxes, game consoles, etc.

- Easy switching between four arbitrary HDMI sources
- Arbitrary distribution from one or two from four possible HDMI input signals on two HDMI displays
- Several switch methods: intelligent automatic selection, IR remote control, touch sensors
- Highest supported video resolution 1080p
- Compatible to High Speed HDMI (1.3b)
- Bandwidth 225MHz/2.25GBps per channel (6.75Gbps all channels)
- Colour depth 12 bit per channel (36 bit all channels)
- HDCP support
- Supports uncompressed audio formats, e.g. LPCM
- Supports compressed audio formats, e.g. DTS Digital, Dolby Digital (incl. DTS-HD and Dolby True HD)
- Dimensions (DxWxH; weight): 128 x 220 x 25mm; 350g

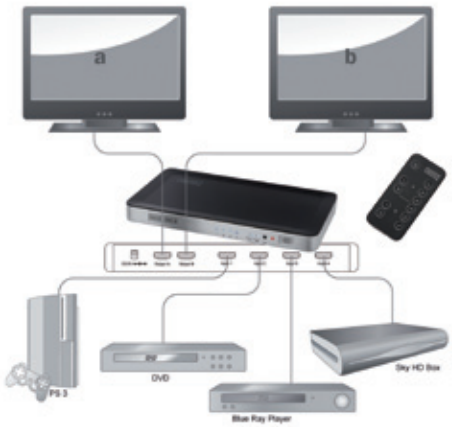

271574 / DS-48300	HDMI Matrix Switch, 4 x 2-Port	**79,90**

DIGITUS® HDMI Splitter, 2-Port

Optimal to connect several TVs and monitors to one HDMI source

Simultaneous playback of a HDMI video signal on several output devices

- Simple handling: Installation in seconds, no manual settings
- Scalable: expanded distribution via cascading of several HDMI splitter
- Highest supported video resolution 1080p
- Supports the 3D functions in all formats, 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Bandwidth 225MHz/2.25GBps per channel (6.75Gbps all channels)
- Colour depth 12 Bit per channel (36 Bit all channels)
- HDCP support
- Supports uncompressed audio formats, e.g. LPCM
- Supports compressed audio formats, e.g. DTS Digital, Dolby Digital (incl. DTS-HD and Dolby True HD)
- Dimensions (LxWxH; weight): 155×70×23mm; 260g

271536 / DS-41300	HDMI Splitter, 2-Port	**55,00**
271543 / DS-42300	HDMI Splitter, 4-Port	**89,90**
268987 / DS-43300	HDMI Splitter, 8-Port	**179,00**
271567 / DS-45300	HDMI Switch, 5-Port	**52,50**

PCI Express Card - Expand your PC without a problem

DIGITUS® SATA II PCI ExpressCard, 1-Port

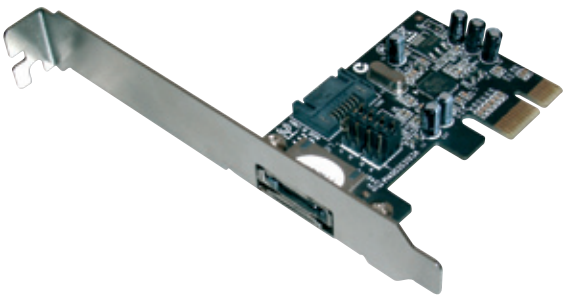

The fast and simple way to upgrade your computer to Serial-ATA-Speed

1 x external eSATA port and 1 x internal SATA port

· Chipset: Sil 3531
· Int. / ext. Ports selectable through configuration
· Corresponds with PCI Express Base Specifications 1.0a
· Corresponds with serial ATA 1.0a specifications and the complete serial ATA II addition
· Suitable for every free PCI express slot with any lane width
· Supports a data transfer rate up to 300MB/s
· Supports NCQ (Native Command Queuing)
· Hot-Plug and Hot-Swapping features
· Supports Windows 7, Vista and XP

244813 / DS-30101 SATA II PCI ExpressCard, 1-Port **25,00**

DIGITUS® SATA II/PATA PCI Express Combo Card

Offers flexibility to connect almost all hard disk types to your computer

2 x external eSATA and 2 x internal SATA ports

· Int. / ext. Ports selectable through configuration
· 1 x internal, parallel ATA port – supports up to UDMA-6 transfer modes
· Chipset: JMB 363
· Altogether up to 4 devices can be connected
· Corresponds with PCI Express Base Specifications 1.0a
· Corresponds with Serial ATA 1.0a specifications and the complete Serial ATA II addition
· Supports a data transfer rate up to 300MB/s
· Supports RAID levels 0, 1, 0+1
· Suitable for every free PCI express slot with any lane width
· Supports NCQ (Native Command Queuing)
· Hot-Plug and Hot-Swapping features for SATA
· Supports Windows 7, Vista and XP

244950 / DS-30103 SATA II / PATA PCI Express Combo Card **29,90**

DIGITUS® Serial Interface Card, PCIe

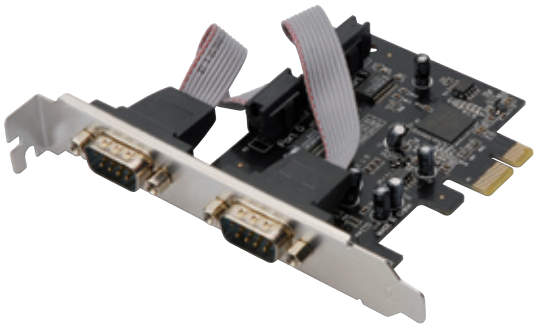

Perfect to connect serial modems, PDSs, digital cameras, printers, ISDN adapters and many more other devices

You can plug this serial PCI express add-on card into your PCI express slot and you'll receive two RS232 (DB9) serial ports. Based on a native single chip design it reduces the CPU load by up to 48% compared to common serial cards.

· 2 x DSUB 9, serial interfaces, male, UART 16C950
· Chipset: OXPCIe952
· Data transfer rate up to 230,400bps
· Corresponds with PCI Express Base Specifications 1.1
· Compatible with PCI Power Management 1.2
· Supports Windows 7, Vista and XP

309390 / DS-30000-1 PCIe, Serial Interface Card 2 x DSUB 9 **29,90**

DIGITUS® Parallel PCI ExpressCard

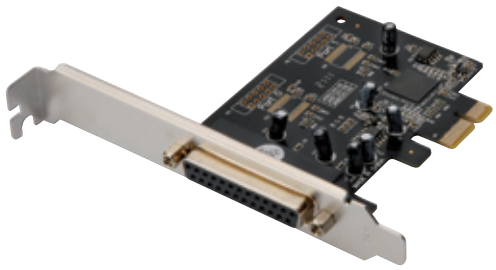

Use all advantages of your High-Speed parallel devices

Get more out of your parallel devices! The DIGITUS® parallel interface card helps your old devices to run at a speed you've never experienced before! With data transfer rates from up to 1.5Mbit/s – up to 3 times faster than your integrated parallel ports!

· 1 x DSUB 25, parallel interface, socket
· Chipset: OXPCIe952
· Data transfer rate up to 2.5Mbps
· Supports Standard Parallel Port (SPP), Enhanced Parallel Port (EPP) & Enhanced Capability Port (ECP)
· Corresponds with PCI Express Base Specifications 1.1
· Compatible with PCI Power Management 1.2
· Supports Windows 7, Vista and XP
· Incl. Low Profile Slot Panel

309383 / DS-30020-1 PCIe, Parallel Interface Card 1 x DSUB 25 **35,50**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® PCIe interface card, 2ser. / 1par.

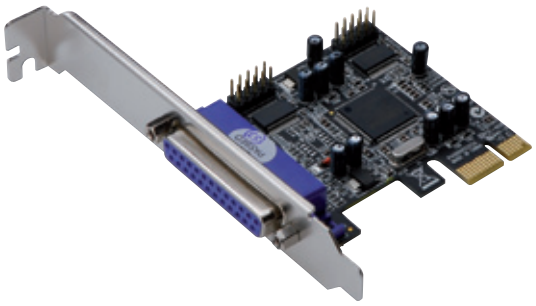

Perfect to connect parallel and serial devices such as printers, scanners, ISDN adapters and many other devices

Multi-I/O PCIe card

- 2 x DSUB 9, serial interfaces, plug, UART16C450/550
- 1 x DSUB 25, parallel interface, socket
- Chipset: MCS9901
- Serial data transfer rate up to 2.3Mbps
- Parallel data transfer rate up to 1.5Mbps
- Supports Standard Parallel Port (SPP), Enhanced Parallel Port (EPP) & Enhanced Capability Port (ECP)
- Corresponds with PCI Express Base Specifications 1.0a
- Scope of delivery: 1 x User manual, 1 x driver CD, 1 x DSUB 25-Parallel-Port cable, 3 x Low-Profile Brackets
- Suitable for Windows Vista/Server 2003/XP/7/8

291749 / DS-30040-1 PCIe, 2 ser. / 1 par. Interface card **33,50**

DIGITUS® Parallel interface card, PCI

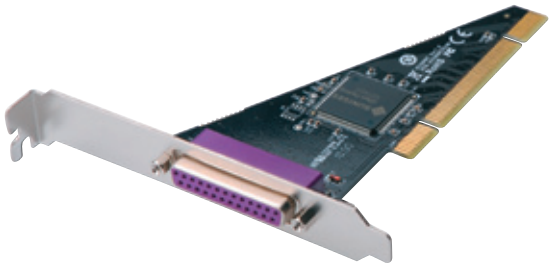

Use all advantages of your High-Speed parallel devices

1 x DSUB 25, parallel interface, socket

- Chipset: 4037T-SUN1989 IC
- Data transfer rate up to 2.7MBps
- Supports Standard Parallel Port (SPP), bi-directional Parallel Port (BPP), Enhanced Parallel Port (EPP) & Enhanced Capability Port (ECP)
- Compatible with IEEE 1284 Standard
- Universal PCI interface 3.3V & 5V, 32-bit/64-bit
- Plug and Play
- Remap for ISA address 278, 378
- Driver for Windows 7, Vista, XP
- Scope of delivery: 1 x user manual, 1 x driver CD

293002 / DS-33010-1 PCI, parallel interface card 1 x DSUB 25 **19,00**

DIGITUS® 2 ser. / 1 par. Interface card, PCI

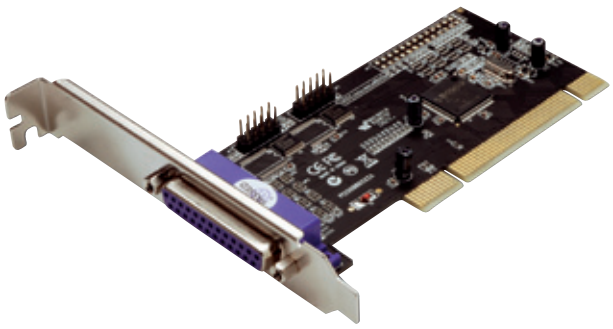

Perfect to connect parallel and serial devices such as printers, scanners, ISDN adapters and many other devices

Multi I/O PCI card

- 2 x DSUB 9, serial interfaces, plug, UART16C450/550
- 1 x DSUB 25, parallel interface, socket
- Chipset: MCS9865
- Serial data transfer rate up to 115,200bps
- Parallel data transfer rate up to 1.5Mbps
- Supports Standard Parallel Port (SPP), Enhanced Parallel Port (EPP) & Enhanced Capability Port (ECP)
- Corresponds with PCI Local Bus specifications, Revision 2.3, 32-bit-bus
- Simple Plug and Play
- Automatic allocation of IRQ- and I/O addresses
- Scope of delivery: 1 x user manual, 1 x driver CD, 1 x standard bracket with serial ports, 3 x low profile brackets
- Suitable for Windows Vista/Server 2003/XP/2000

309376 / DS-33040-1 PCI, 2 ser. / 1 par. Interface card **19,00**

DIGITUS® 2-Port USB 3.0 PCI ExpressCard

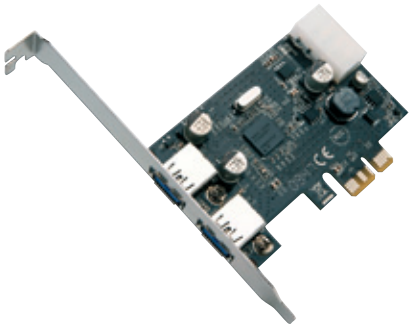

The performance kick for the new generation of ultra-fast USB devices

2 x USB 3.0 Ports

- Chipset: NEC D720200
- Backward compatible with USB 2.0/1.1 devices
- Supported data transfer rates: Supper-Speed (5Gbps), High-Speed (480Mbps), Full-Speed (12Mbps) and Low-Speed (1.5Mbps)
- Supports Plug and Play and Hot-Swapping
- Conform with Universal Serial Bus 3.0 specifications Rev. 1.0
- Corresponds with PCI express basic specifications 2.0; bus interface PCIe x1
- Supports PCI bus power management interface specifications 1.2
- Incl. Low Profile Slot Panel
- Suitable for Windows 7, Vista, XP
- Microsoft certified WHQL drivers for Windows 7 32/64-bit, Vista 32/64-bit and XP 32/64-bit

292067 / DS-30220-2 USB 3.0 PCI ExpressCard, 2-Port **26,50**

DIGITUS® External hard disk housing 2.5, SATA to USB 2.0

Easy installation, bolt-free design

The external DIGITUS® hard disk casing offers you the flexibility to use your usual HDD in a modern and stylish casing. The compact design allows fast installation of a 2.5 SATA hard disk without cumbersome fastening screws and without tools. Simply open the casing and plug in the hard disk – done. In addition, the compact design enables you to transport your data comfortably and to recall them via a common USB 2.0 cable on almost any PC, e.g. at home, in the office or at friends.

- Easy bolt-free installation of a hard disk
- Modern design in piano lacquer optics
- Suitable for Standard SATA hard disks 2.5
- Capacity: up to 3TB
- Compatible with USB 2.0 specifications
- Supports data transfer rates up to 480Mbps
- LED display: Power (red), access (blue)
- Supports hot-plugging and is plug and play ready
- Power supply via USB port
- Size: 13.5cm x 8.5cm x 1.5cm (LxWxH)
- Suitable for Windows 7, Vista, XP and Mac OS 10.x

297925 / DA-71002	External hard disk casing 2.5, SATA on USB 2.0	**24,50**
297932 / DA-71030	External hard disk casing 2.5, SATA on USB 3.0	**29,00**

DIGITUS® External hard disk housing 3.5 SATA to USB 2.0

Easy installation, bolt-free design

The external DIGITUS® hard disk casing offers you the flexibility to use your usual HDD in a modern and stylish casing. The compact design allows fast installation of a 3.5 SATA hard disk without cumbersome fastening screws and without tools. Simply open the casing and plug in the hard disk – done. In addition, the compact design enables you to transport your data comfortably and to recall them via a common USB 2.0 cable on almost any PC, e.g. at home, in the office or at friends.

- Easy bolt-free installation of a hard disk
- Modern design in piano lacquer optics
- Suitable for standard SATA hard disks 3.5
- Capacity: up to 3TB
- Compatible with USB 2.0 specifications
- Supports data transfer rates up to 480Mbps
- LED display: Power (red), access (blue)
- Supports hot-plugging and is plug and play ready
- Size: 19.6cm x 11.1cm x 3.5cm (LxWxH)
- Suitable for Windows 7, Vista, XP and Mac OS 10.x

297956 / DA-71051	External hard disk casing 3.5, SATA to USB 2.0	**35,50**
297963 / DA-71035	External hard disk casing 3.5, SATA to USB 3.0	**35,50**

DIGITUS® Hard Disk USB 3.0 Cool Dock, for 2.5/3.5 HDDs

Save your most precious moments

Supports USB 3.0 to serial ATA interface, transfer rate up to 5Gbps

- Supports 2.5/3.5 SATA hard disks
- Supports SATA, SATA II
- Capacity: up to 3TB
- Backup function via pressing a button
- Integrated 80mm fan
- Alarm display with excessive temperature
- LED display for activity and data transfer
- Plug and Play and Hot-Plug capable
- Hard disks easy to install and to remove
- Power adaptor (12V/2A) also provided.
- Supports Windows 7, Vista and XP

287414 / DA-70546	USB 3.0 Cool Dock	**42,50**

DIGITUS® USB 3.0 SATA Dual Docking Station

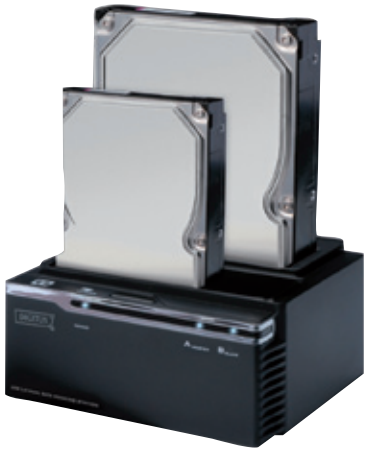

Ideal for backups, data archiving and service applications

To accept 2 x 3.5 or 2.5 SATA hard disks, slot units – data can be transferred between 2.5 and 3.5 SATA hard disks

- One-touch backup function (multi-language driver)
- Two hard disks can be read or written to simultaneously
- Supports USB 3.0 SUPERSPEED with up to 5Gbps, USB 2.0 HIGH-SPEED with up to 480Mbps and USB 1.1 FULL-SPEED with 12Mbps
- Supports hot swapping of connected devices
- Supports SATA 1.5Gbps/3.0Gbps transfer rate
- Supports hard disks with a size of over 2TB
- Supports Windows 7, Vista and XP

287926 / DA-70547	USB 3.0 SATA Dual Docking Station	**57,50**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® USB 3.0 for SATA adapter cable

Turns every SATA hard disk into an ultra-fast external USB 3.0 drive – ideal for backup and service

Supports 2.5/3.5 SATA hard disks

- Compatible with all SATA standards
- Supports data transfer: Super-Speed (5Gbps)/High-Speed (480Mbps)/Full-Speed (12Mbps)/ Low-Speed (1.5Mbps)
- Compatible with USB 3.0 specifications, backward compatible with USB 2.0 and USB 1.1
- Supports ATA/ATAPI Ultra DMA mode
- Supports ATA/ATAPI PACKET Command Feature Set
- Compatible with USB Mass Storage Class
- "Plug & play" and hot-swappable
- High-Speed data transfer, low power consumption
- Incl. power supply unit, input: AC 100-240V, 50/60Hz, Output: DC 12V2A
- Supports Windows 7, Vista and XP

287919 / DA-70300 USB 3.0 to SATA II adapter cable **33,50**

DIGITUS® SATA on IDE adapter

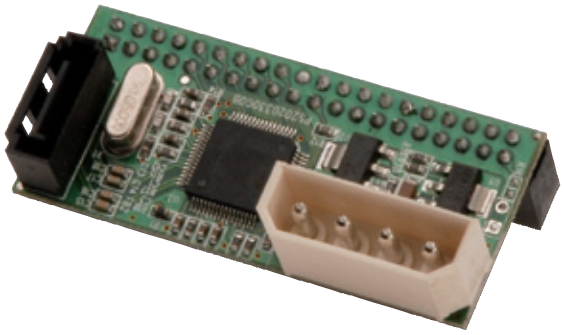

The perfect solution to connect IDE/ATA hard disks to motherboards that have only SATA controllers

Allows the use of IDE storage devices with 40 pin IDC plugs at a serial ATA controller.

- Stand-alone serial ATA on Ultra ATA Bridgeboard design
- Serial ATA 1.0 Specifications, Revision 2.2 conform
- Chipset: JM20330
- Supports PIO mode 0-4
- Ultra ATA 133 / 100 / 66 / 33 support
- Supports all kinds of ATAPI, ATA/133, ATA/100, ATA/66, ATA/33, EIDE and IDE storage devices (DVD, DVD-RAM, MO, CD-ROM, CD-RW, Hard Disk)
- Compact dimensions for direct connection to ATA hard disks
- Board design: Horizontal version

244967 / DS-33150 SATA to IDE adapter **19,90**

DIGITUS® Two-times 2.5 hard disk installation frame

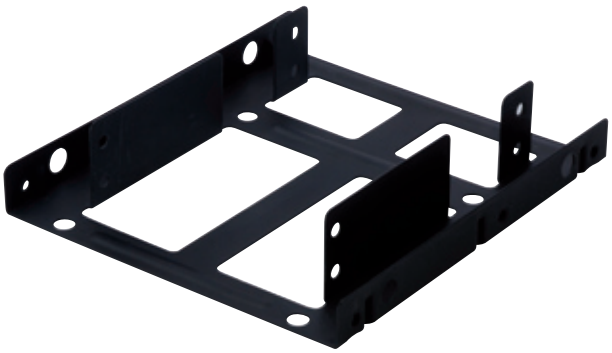

Suitable for installing of up to 2 HDDs or 2.5 SSDs in a 3.5 tray

- Usable with HDDs or SSDs
- Also suitable for small Media Center PCs
- Easy installation
- Size: 11.5cm X 10.1cm X 2.3cm
- Metal design for better heat dissipation of the HDDs
- Incl. bracket and screws

291893 / DA-70431 assembly kit: Dual HDD 2.5 -> 3.5 BAY **9,00**

DIGITUS® Premium SATA hard disk exchange frames, grey and black

This makes each hard disk 3.5 a simply to-be-exchanged mobile hard disk – ideal for backups

High quality hard disk exchange frame for SATA hard disks 3.5

- Full ALU casing with plastic panel, improved EMI/RFI protection
- Integrated fan at lower side
- Drawer can be locked
- With status LED

236412 / DA-50217 Premium SATA hard disk exchange frame aluminium, black **39,00**

USB 2.0 Hubs - Expand your possible connections

DIGITUS® USB 2.0 hub, 10-Port

Extends your connectivity

USB 2.0 and USB 1.1 compatible

· 10 x USB A, sockets (USB 1.1 and 2.0 end devices)
· Maximum data transfer rate 480Mbps (USB 2.0)
· Surge protection at all outputs
· Supports hot-plugging and is plug and play ready
· Delivery including USB connection cable (1m) and power supply unit
· Supports Windows 7, Vista, XP, Mac OS X environment

278740 / DA-70228 USB 2.0 hub, 10-port **25,50**

DIGITUS® USB 2.0 hub, 4-port

Expand your connectivity!

The DIGITUS® USB 2.0 4-port hub lets you operate up to four USB devices at the same time on a PC or Mac. Connect your favorite devices and enjoy the rapid USB 2.0 speed. This product impresses by its clear and elegant design with black front and back panel in piano optics and aluminium-coloured edges.

· USB 2.0 compliant
· Four USB 2.0 ports
· USB Mini B socket
· Supports USB High Speed 480Mbps and Full Speed 12Mbps
· Supports media copy and hot-swap
· Supports hot-plugging and is plug and play ready
· Colour: black, silver
· Dimensions: 5.4cm x 2.8cm x 1.2cm
· Incl. adapter (5V / 2A) and USB cable

306535 / DA-70220 DIGITUS® USB 2.0 4-Port, black and silver **17,50**

DIGITUS® Wall mounting for TFT displays

Comfortable viewing enjoyment for the perfect multimedia adventure

Supports VESA standard - dimensions (75x75mm and 100x100mm)

· Own weight: 0.8kg
· Total length 80mm
· Maximum resilience 15kg
· Monitor rotatable by: 180°

239376 / DA-90307 Wall mounting for TFT displays **45,00**

The indicated prices reflect retail prices in CHF incl. 8% VAT

DIGITUS® Mini USB Charging Adapter

Tiny USB charger for the car – ideal for charging your USB devices when travelling

Whether it is for your iPhone, cell phone or your MP3 player – this adapter charges your electronic devices in the shortest of time. The perfect mini-design is easy to handle; an LED shows when charging has been completed.

· Compact housing
· Universal charger for almost all electronic devices with USB charger port
· Fits all accessories outlets in the car, mobile homes or boats (cigarette lighter)
· Suited for charging cell phones, MP3 players, iPods, PDAs etc.
· The adapter fits almost flush into the socket so it won't be in the way
· Fold-out bracket for comfortable removal from the socket
· LED operating display
· Input voltage: 12-24V
· Output voltage: 5V/1A

288381 / DA-11001 USB Charging Device for cars, mini type **9,90**

DIGITUS® USB serial adapter, USB 2.0

Connects serial devices via USB port to a PC

The elegant way to connect serial devices such as modems, PDAs, etc. via an USB port. The high compatibility guarantees transfer rates of beyond 1Mbps.

· Easy connection of serial devices via USB port
· Supports the RS232 serial interface
· Corresponds with USB 2.0 standard
· Data transfer rates up and above 1Mbps
· Supports remote wake-up function and power management
· For use with, e.g., PDA, modems and many other serial devices
· Chipset: FTDI/FT232RL
· Incl. USB extension cord, about 80cm
· Supports Windows 7, Vista, XP, Mac OS X and Linux

271611 / DA-70156 USB - Serial Adapter, USB 2.0 **17,50**

DIGITUS® Mini USB Charging Adapter

Tiny USB charger for the car – ideal for charging your USB devices when travelling

Whether it is for your iPhone, cell phone or your MP3 player – this adapter charges your electronic devices in the shortest of time. The perfect mini-design is easy to handle; an LED shows when charging has been completed.

· Compact housing
· Universal charger for almost all electronic devices with USB charger port
· Fits all accessories outlets in the car, mobile homes or boats (cigarette lighter)
· Suited for charging cell phones, MP3 players, iPods, PDAs etc.
· The adapter fits almost flush into the socket so it won't be in the way
· Fold-out bracket for comfortable removal from the socket
· LED operating display
· Input voltage: 12-24V
· Output voltage: 5V/1A

233923 / DA-70130-3 USB 2.0 Repeater cable 5m **12,50**

293248 / DA-73100 USB 2.0 Repeater cable 10m **16,00**

DIGITUS® USB serial adapter, USB 2.0

Connects serial devices via USB port to a PC

The elegant way to connect serial devices such as modems, PDAs, etc. via an USB port. The high compatibility guarantees transfer rates of beyond 1Mbps.

· Easy connection of serial devices via USB port
· Supports the RS232 serial interface
· Corresponds with USB 2.0 standard
· Data transfer rates up and above 1Mbps
· Supports remote wake-up function and power management
· For use with, e.g., PDA, modems and many other serial devices
· Chipset: FTDI/FT232RL
· Incl. USB extension cord, about 80cm
· Supports Windows 7, Vista, XP, Mac OS X and Linux

166306 / DC USB-PM1 Parallel -> USB-printer cable 1.8m **18,00**

Current Catalogs

ASSMANN Network Technology 2012/13

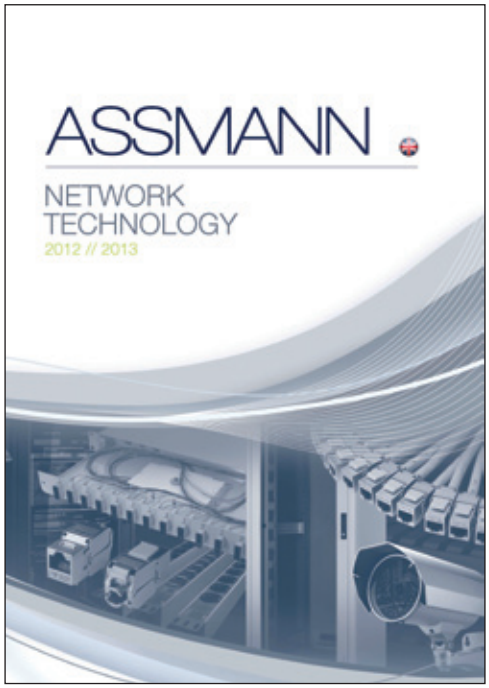

312208 / AM-30109 ASSMANN Network Technology 2012/13

ASSMANN Cable Catalog 2012/13

312253 / AM-30011 ASSMANN Cable catalog 2012/13

DIGITUS® Main Catalog 2013

326793 / DM-30046 DIGITUS® Main Catalog 2013

Ednet Catalog 2012

98005 Ednet Catalog 2012

ASSMANN Electronics – Your innovative partner for your IT infrastructure

The ASSMANN Electronics GmbH was founded in the German Lüdenscheid in 1969 as a manufacturer of plug connections and adapters for internal and external computer cables. The brand DIGITUS® was introduced in 1994 and is meanwhile known throughout the world for its high quality product portfolio as well as its excellent price-performance ratio.

Today the ASSMANN Group has subsidiaries in Austria, Switzerland, France, Croatia, Poland, China, Taiwan and Russia and delivers its products to distributors, retail outlets, system integrators, OEMs and corporate resellers.

The assortment consists mainly of DIGITUS® products such as active and passsive network components, KVMs. USB and FireWire products, cables, adapters and plug connections, (S)ATA and SCSI products as well as computer and multimedia accessories.

The brand DIGITUS® Professional was created for professional network solutions. ASSMANN offers solutions from one source – from cabinet systems to power supply and the air conditioning of data centres, connection and distribution systems to glass and copper components and already installed fibre glass lines and respective measuring technique.

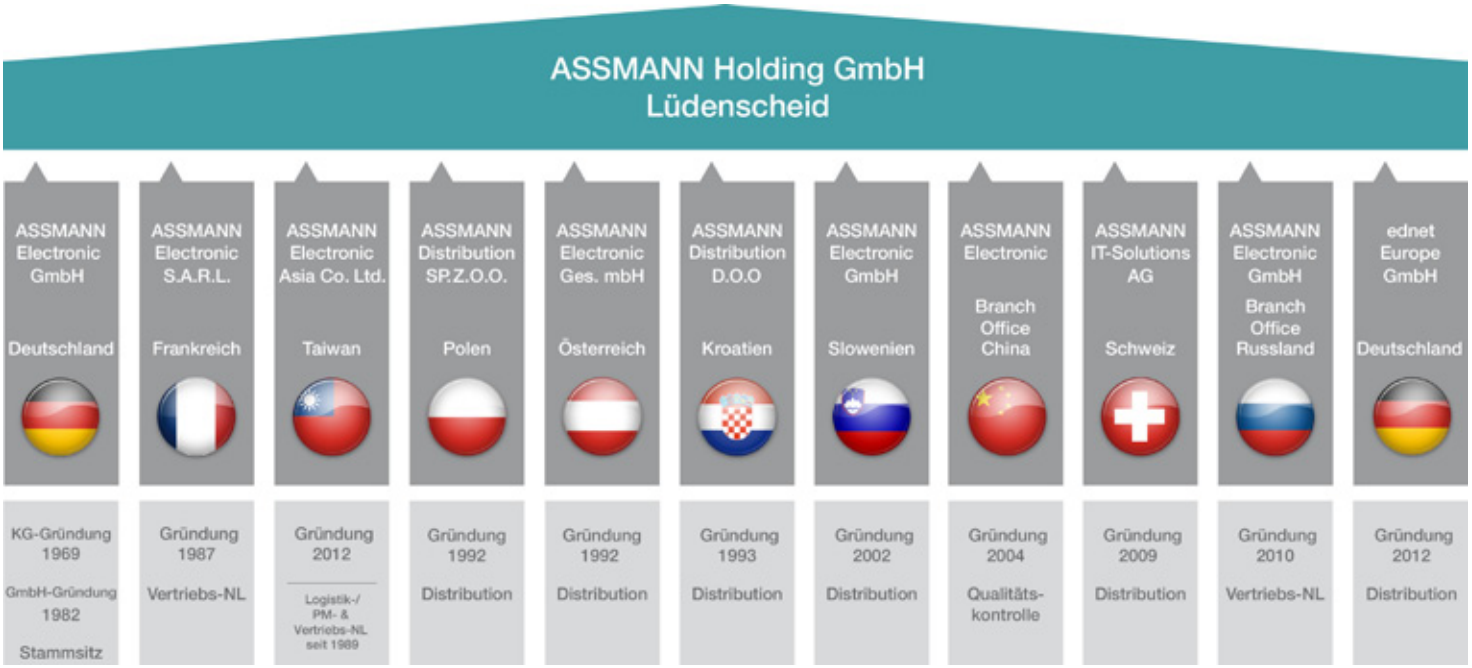

Strong contacts for 40 years:

The ASSMANN team has maintained existing and new contacts with our manufacturing sites in Europe, Asia and the United States for 40 years. Through ASSMANN you'll be using direct contact to those manufacturing sites.
We guarantee e.g. the successful progress of your OEM/ODM project acc. to DIN EN ISO 9001:2000 and since 2003 also acc. to DIN EN ISO 14001:1996. Basis for our manufacturing and quality features and standards are UL, ETL, IEEE, VDE, TÜV, ISO, IEC and CE.

ASSMANN Switzerland

ASSMANN IT-Solutions AG
Europastrasse 15
CH-8152 Glattbrugg

Tel..... +41 / 43 501 / 39 00
Fax ..... +41 / 43 501 / 39 01
E-Mail.....info@assmann-it.ch
Internet.....www.assmann-it.ch

ASSMANN Germany

ASSMANN Electronic GmbH
Auf dem Schüffel 3
D-58513 Lüdenscheid

Tel.....+49 / 23 51 / 5 54-0
Fax .....+49 / 23 51 / 5 54-50
E-Mail.....info@assmann.com
Internet.....www.assmann.com

ASSMANN France

ASSMANN Electronic S.A.R.L.
Villa Parc - Immeuble le Chêne
Allée Lech Walesa
F-77185 Lognes

Tel.....+33 / 1 / 60 17 91 51
Fax .....+33 / 1 / 64 80 44 73
E-Mail..... sales@assmann.fr
Internet.....www.assmann.com

ASSMANN Poland

ASSMANN Distribution Sp. z o.o.
ul. Szczecinska 17-21
PL-54-517 Wroclaw

Tel.....+48 / 71 / 3 26 71 40
Fax .....+48 / 71 / 3 26 71 41
E-Mail.....office@assmann.pl
Internet..... www.assmann.pl

ASSMANN Austria

ASSMANN Electronic Ges.mbH
Gewerbepark 8
A-8401 Kalsdorf / Graz

Tel.....+43 / 31 35 / 5 44 33-0
Fax ..... +43 / 31 35 / 5 44 33-22
E-Mail.....office@assmann24h.at
Internet.....www.assmann24h.at

ASSMANN Croatia

ASSMANN Electronic D.O.O.
Radnicka cesta 220
HR-10000 Zagreb

Tel.....+385 / 1 / 4 66 03 08
Fax .....+385 / 1 / 4 66 03 09
E-Mail.....info@assmann.hr
Internet.....www.assmann.hr

ASSMANN Slovenia

ASSMANN Electronic Slovenia
Sales Office Slovenia
Jocova 12
SLO-2000 Maribor

Tel.....+386 / 2 / 4 21 51 77
Fax .....+386 / 2 / 6 20 19 32
E-Mail..... p.jezernik@assmann24h.at
Internet.....www.assmann24h.at

ASSMANN Russia

Branch Office Russia
61 Suvorovsky pr., Suite 148
RUS-St. Petersburg

Tel..... +7 / 964 / 327 2988
E-Mail.....rosenfeld@digitus.eu
Internet.....www.assmann.com

ASSMANN Taiwan

ASSMANN Electronic Branch Office
6F, No.552 Zhong Xiao E. Rd., Sec. 5
110 Taipei/Taiwan ROC

Tel.....+886 / 2 / 27 27 83 35
Fax .....+886 / 2 / 27 59 22 32
E-Mail..... info@assmann.com.tw
Internet.....www.assmann.com

ASSMANN China

ASSMANN Electronic China Branch
Room 2C, 2F, Jin Lian Xuan, Lotus Plaza, No.126
De Zheng Zhong RD. Changan Town,
Dongguan City, Guangdong 523847, China

Tel.....+86 / 769 / 85 42 62 - 01 and 02
Fax ..... +86 / 769 / 85 42 62 00
E-Mail..... info@assmann.com.tw
Internet.....www.assmann.com